

## Lubricant




Lubricant 10 ml  
ALT0000001000



Lubricant 25 ml  
ALT0000003000

Natural tallow is used to lubricate the sealing modules and the inside of the frame. This provides even compression, a secure seal and brings ease to the installation.

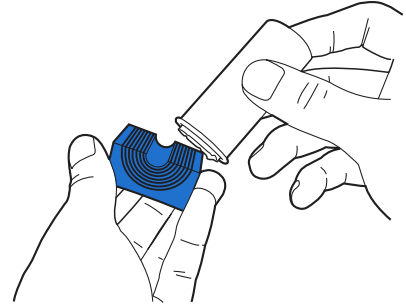

## Assembly Gel



Assembly Gel 30 ml  
ALT0000004000



Assembly Gel Bag 10 ml  
ALT0000005000

## TSL sealing strip



TSL 0.6 Sealing Strip  
ATS0000061000



TSL 1.0 Sealing Strip  
ATS0000101000



TSL 50x18 Sealing Strip  
ATS0000181000

TSL sealing strips for use with flanged frames.

