


MATERIAL AND SURFACE TREATMENT
MILD STEEL / POWDER COATED RAL 7035

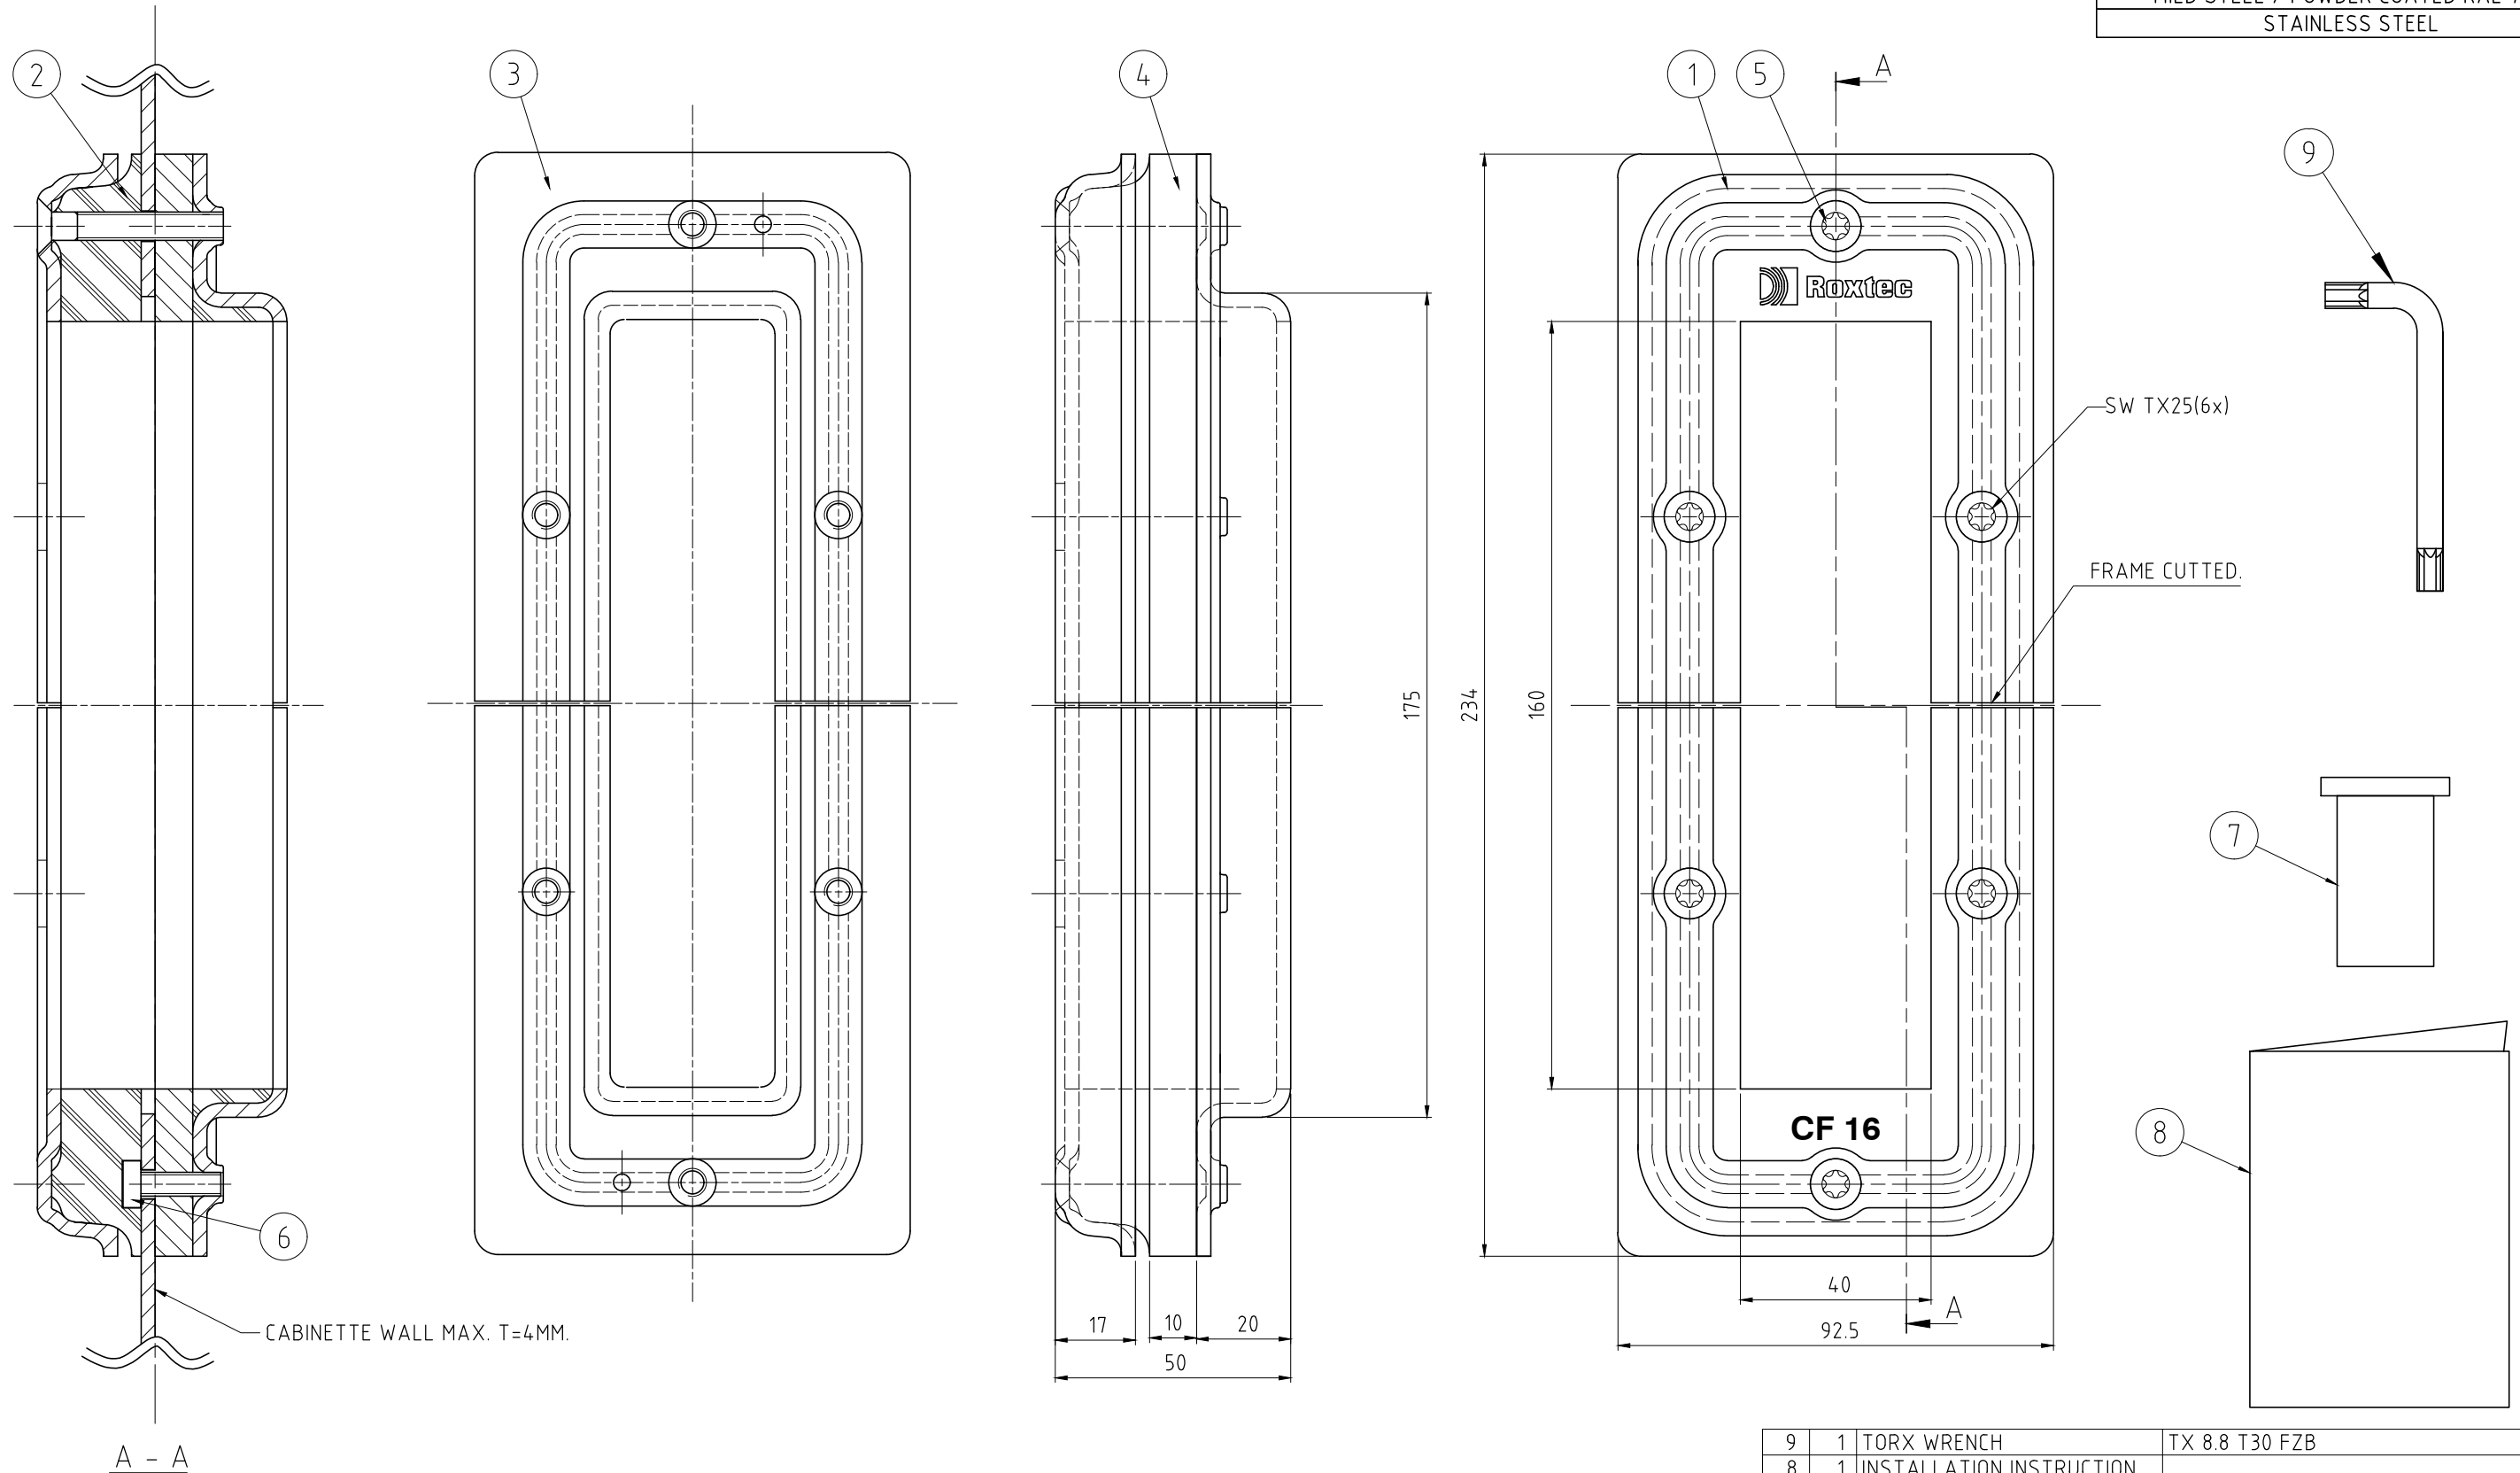

9	1	TORX WRENCH	TX 8.8 T30 FZB	-
8	1	INSTALLATION INSTRUCTION		-
7	1	LUBRICANT	10 ml	-
6	2	SCREW	MRX-Z M5x20 4,8 A4	-
5	6	SCREW	MKFT 8.8 TX M6x45, A4	-
4	1	EMC PLATE	ALUMINUM	-
3	1	BACK PIECE EMC	GALVANIZED MILD STEEL	-
2	1	COMPRESSION RUBBER EMC	NITRIL	-
1	1	TOP PIECE	MATERIAL OPTIONS IN TABLE	-
Item	Qty	Designation	Specification	NetWeight
General tolerance ISO 2768-1/2-m/k EN ISO 13920-BF	Molded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12.5	Designed by se-joahel Created Date 2003-12-17 Approved by se-jenboh Approved Date 2017-11-28 Format A2 Scale 1:1	TotalWeight
 Roxtec www.roxtec.com		Title CF 16 EMC OPEN ASSEMBLY Restricted due to Information drawing		Projection method  Drawing number S1005742 Rev C

C	TORX WRENCH ADDED, TABLE UPDATED	2017-11-28	se-mikgru
Rev	Type of revision	Date	Sign