

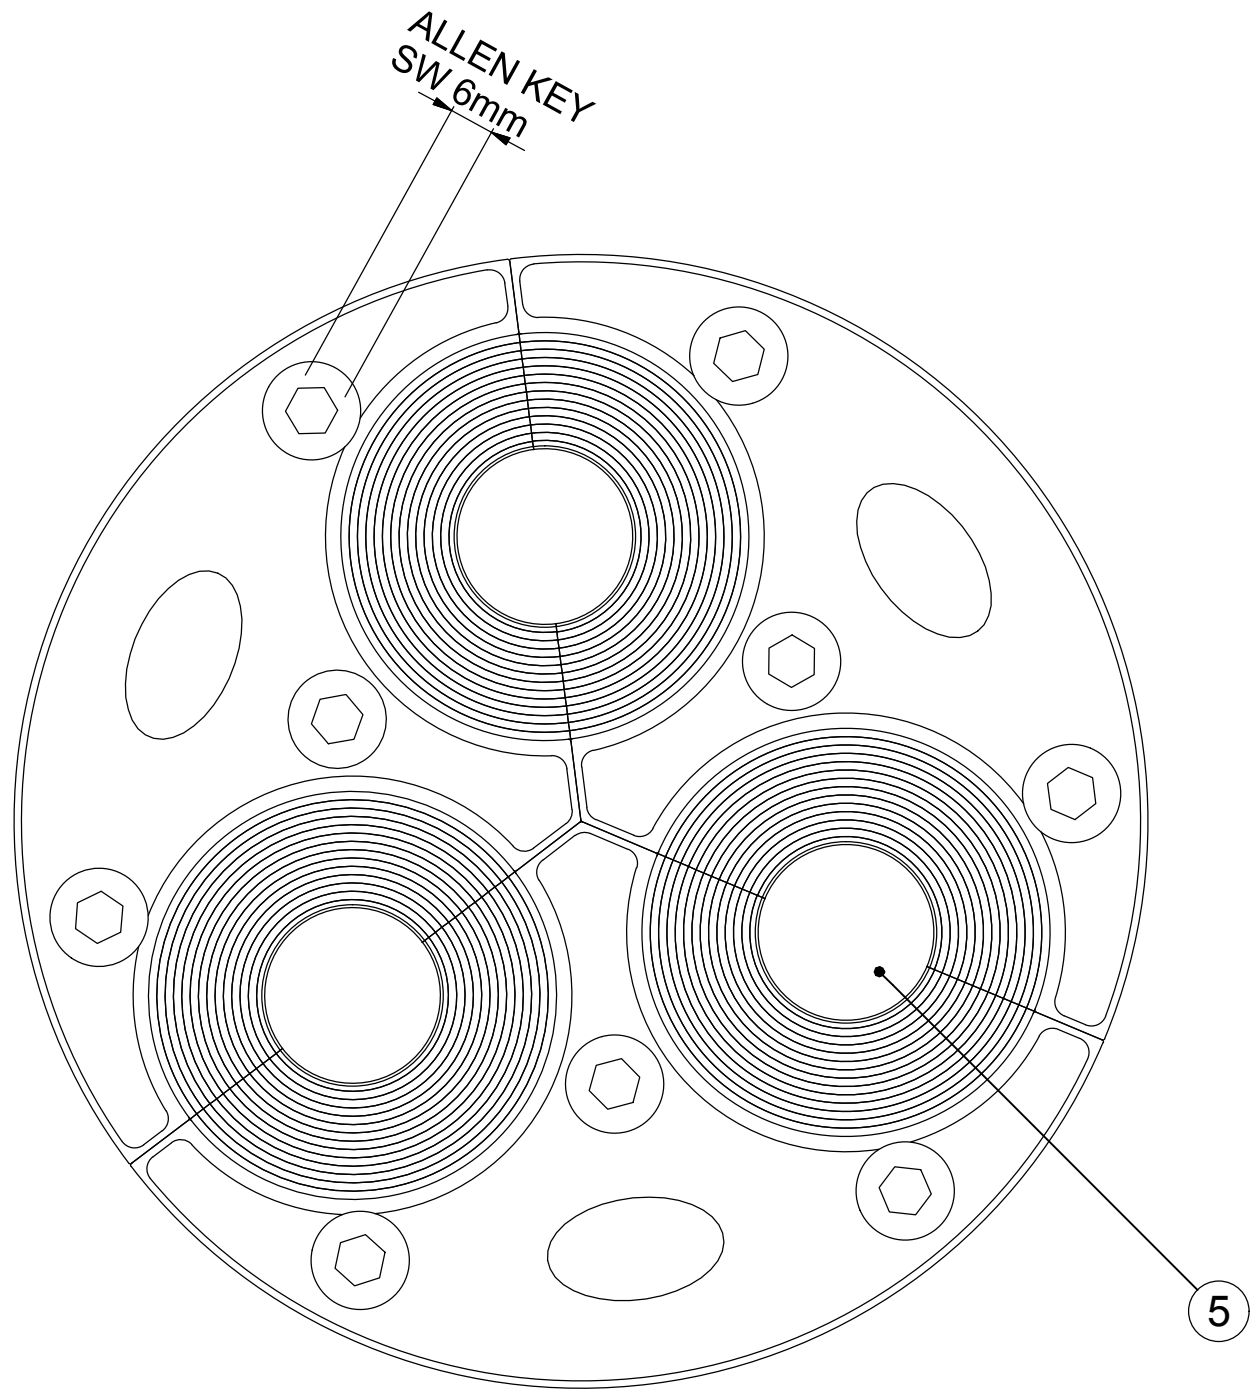
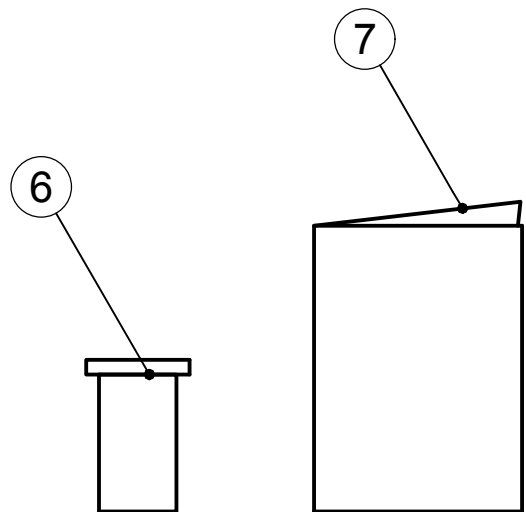


将克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden

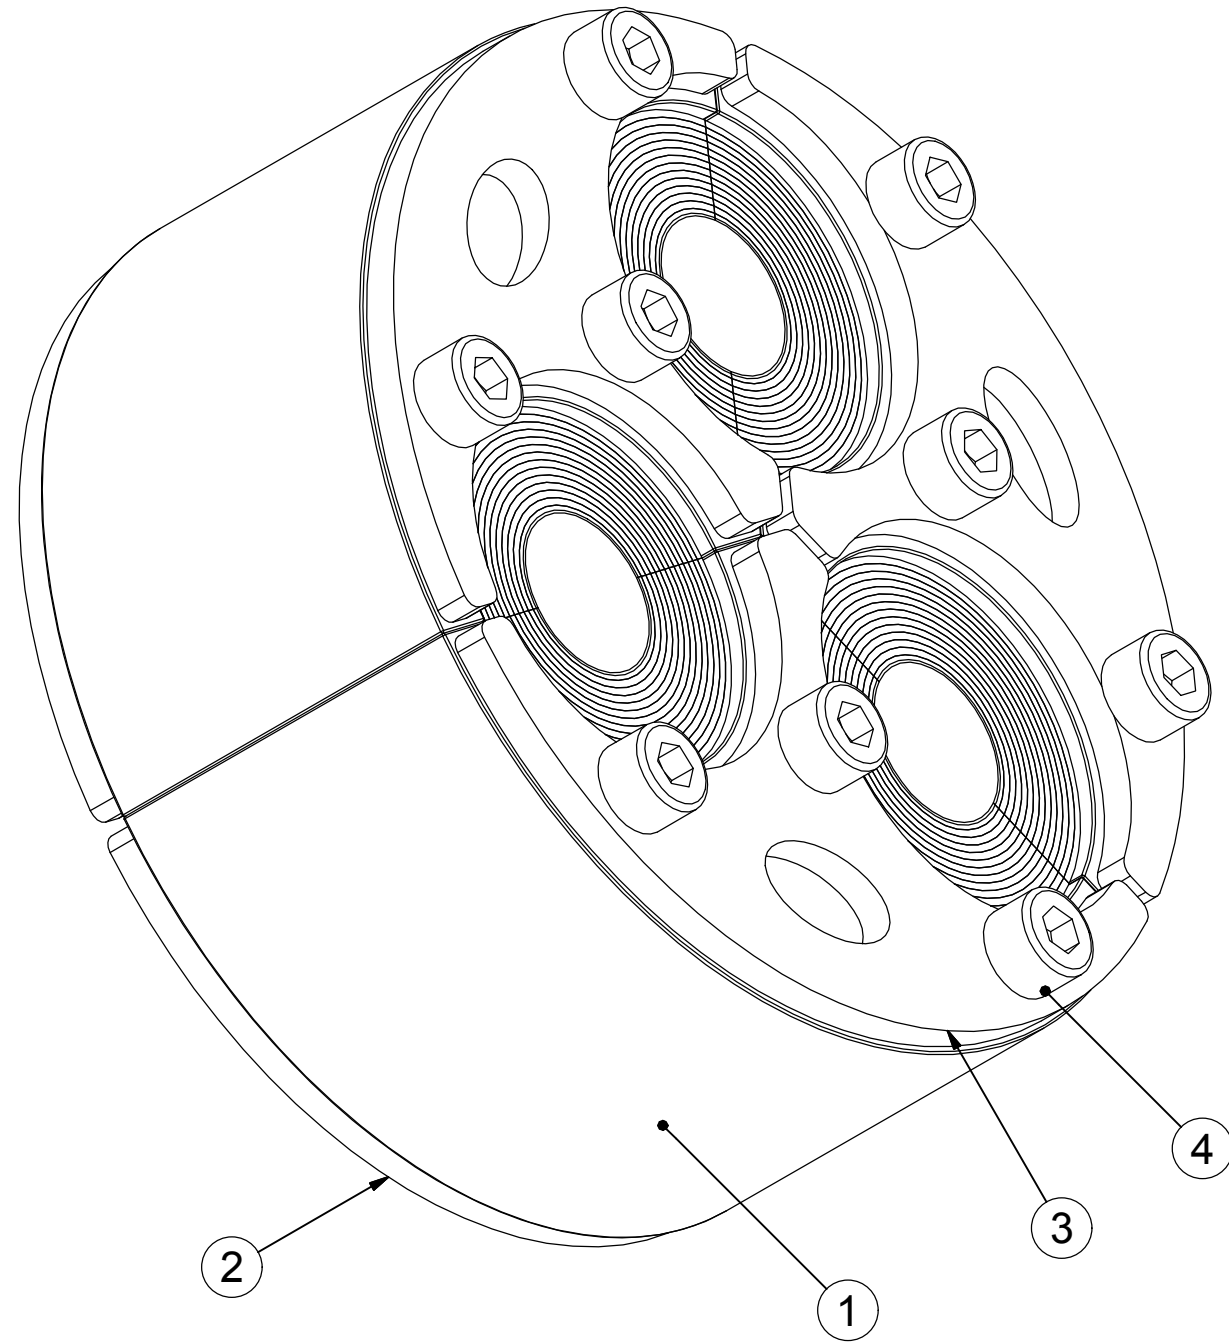

NOTE:
WOC VERSION IS WITHOUT
CENTER CORES

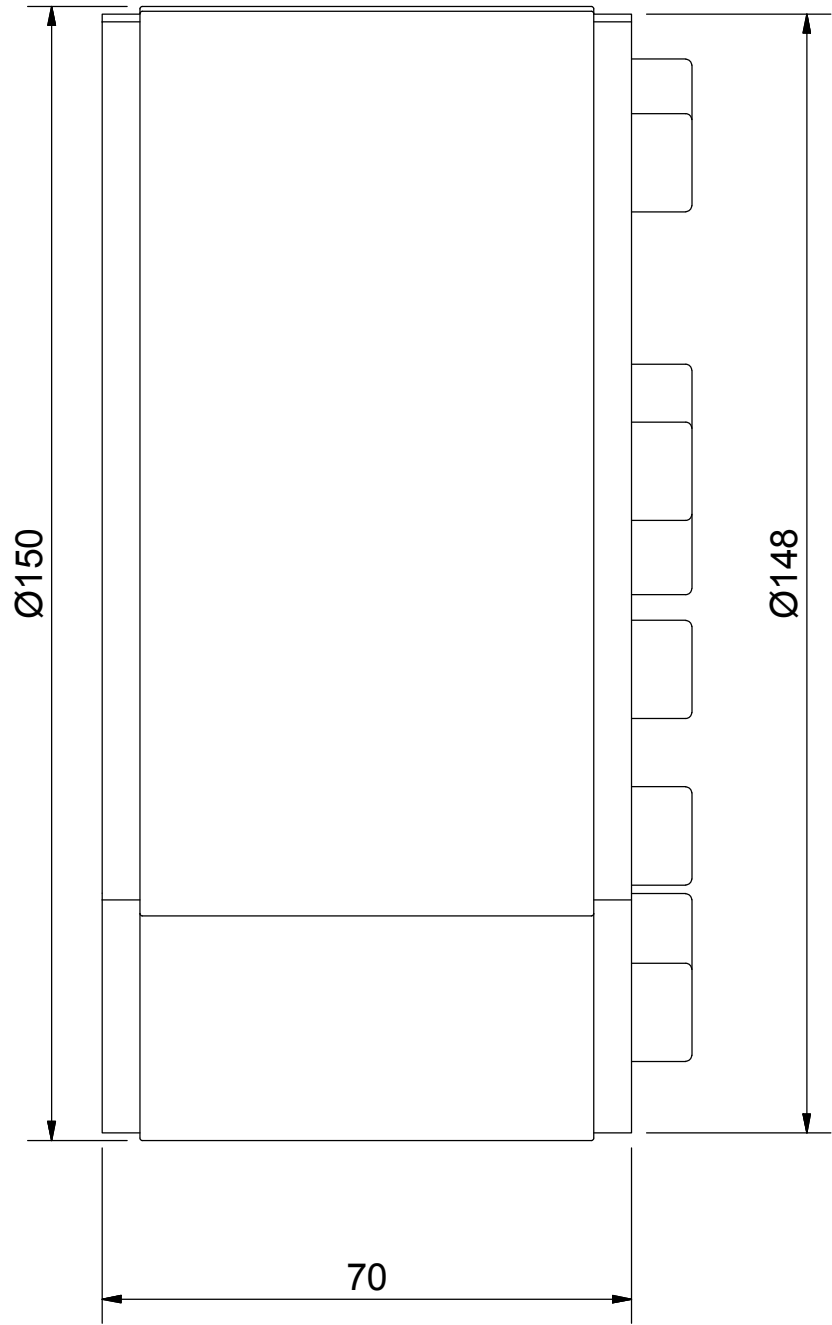

7	1	INSTALLATION INSTRUCTION			
6	1	LUBRICANT	10 ml		
5	3	CORE			
4	9	SCREW	MC6S M8x70 A4		
3	3	FRONT FITTING	T=5mm ACID PROOF STAINLESS STEEL		
2	3	REAR FITTING	T=5mm ACID PROOF STAINLESS STEEL		
1	3	RUBBER FRAME	ROXYLON		
ITEM		QTY	Designation		Weight
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B	General surface roughness: Ra 12.5	Designed by/date se-jenboh 2015-10-29	Approved by/date
Format A2		Scale 1:-	Title H3 150 UG INSERTABLE ASSEMBLY		TotWeight
www.roxtec.com		Information drawing		Drawing number S1507677	Rev A