


洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。


All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

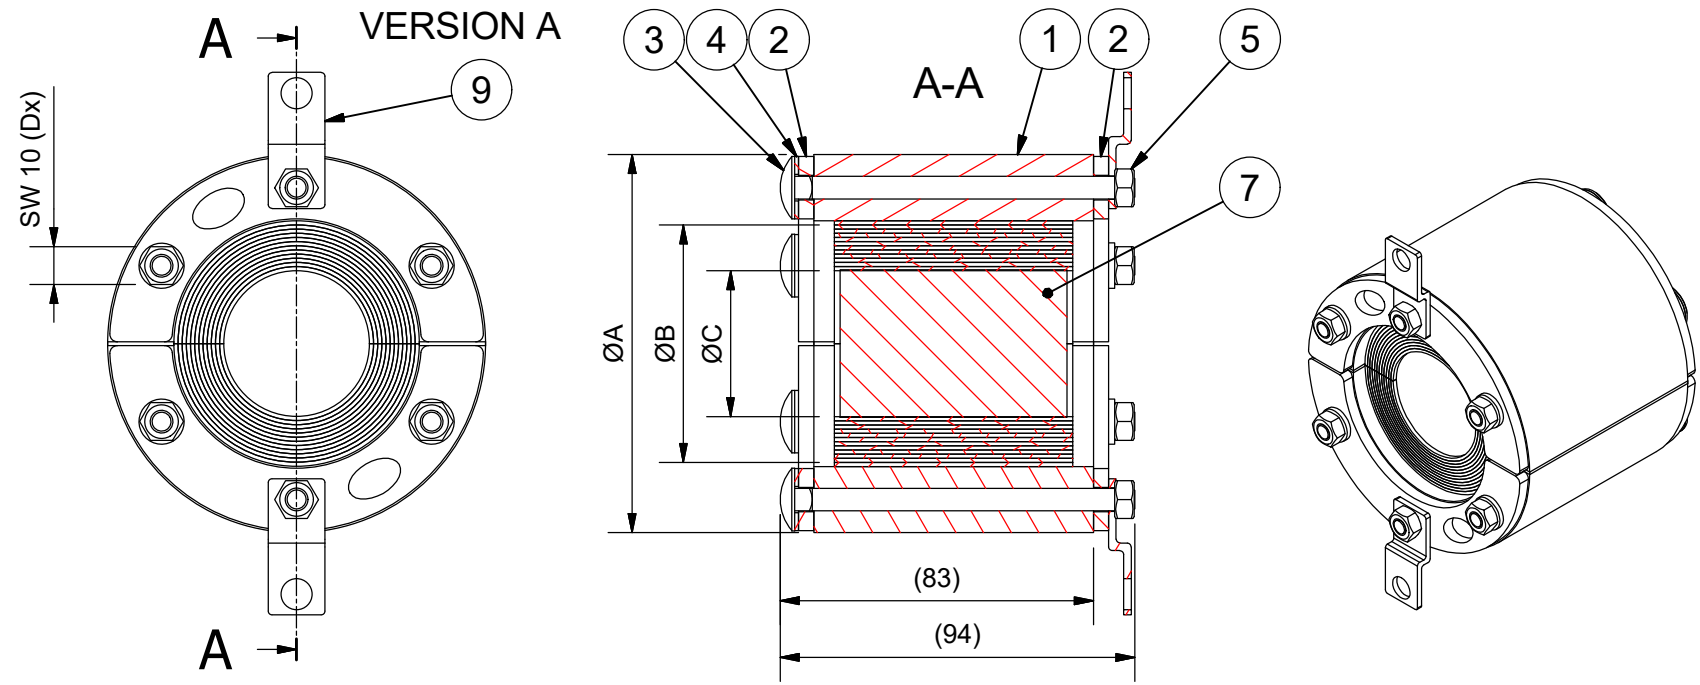


D

PRODUCT	APERTURE A (MM)	RANGE C-B (MM)	D (QTY)	VER.	T (MM)
RS 70 UG	70-75	9-33	4	A	-
RS 75 UG	75-80	9-33	4	B	2.5
RS 85 UG	80-85	9-33	4	B	5
RS 90 UG	90-95	24-53	6	A	-
RS 95 UG	95-100	24-53	6	B	2.5
RS 100 24-53 UG	100-105	24-53	6	B	5
RS 100 UG *	100-105	39-63	6	A	-
RS 105 UG *	105-110	39-63	6	B	2.5
RS 110 UG *	110-115	39-63	6	B	5
RS 125 UG *	125-130	55-88	6	A	-
RS 130 UG *	130-135	55-88	6	B	2.5
RS 135 55-88 UG *	135-140	55-88	6	B	5
RS 135 UG *	135-140	65-98	6	A	-
RS 140 UG *	140-145	65-98	6	B	2.5
RS 145 UG *	145-150	65-98	6	B	5
RS 150 UG WOC	150-155	80-113	8	A	-
RS 155 UG WOC	155-160	80-113	8	B	2.5
RS 160 UG WOC	165-170	80-113	8	B	5
RS 185 UG WOC	185-190	115-148	8	A	-
RS 190 UG WOC	190-195	115-148	8	B	2.5
RS 195 UG WOC	195-200	115-148	8	B	5

VERSION B

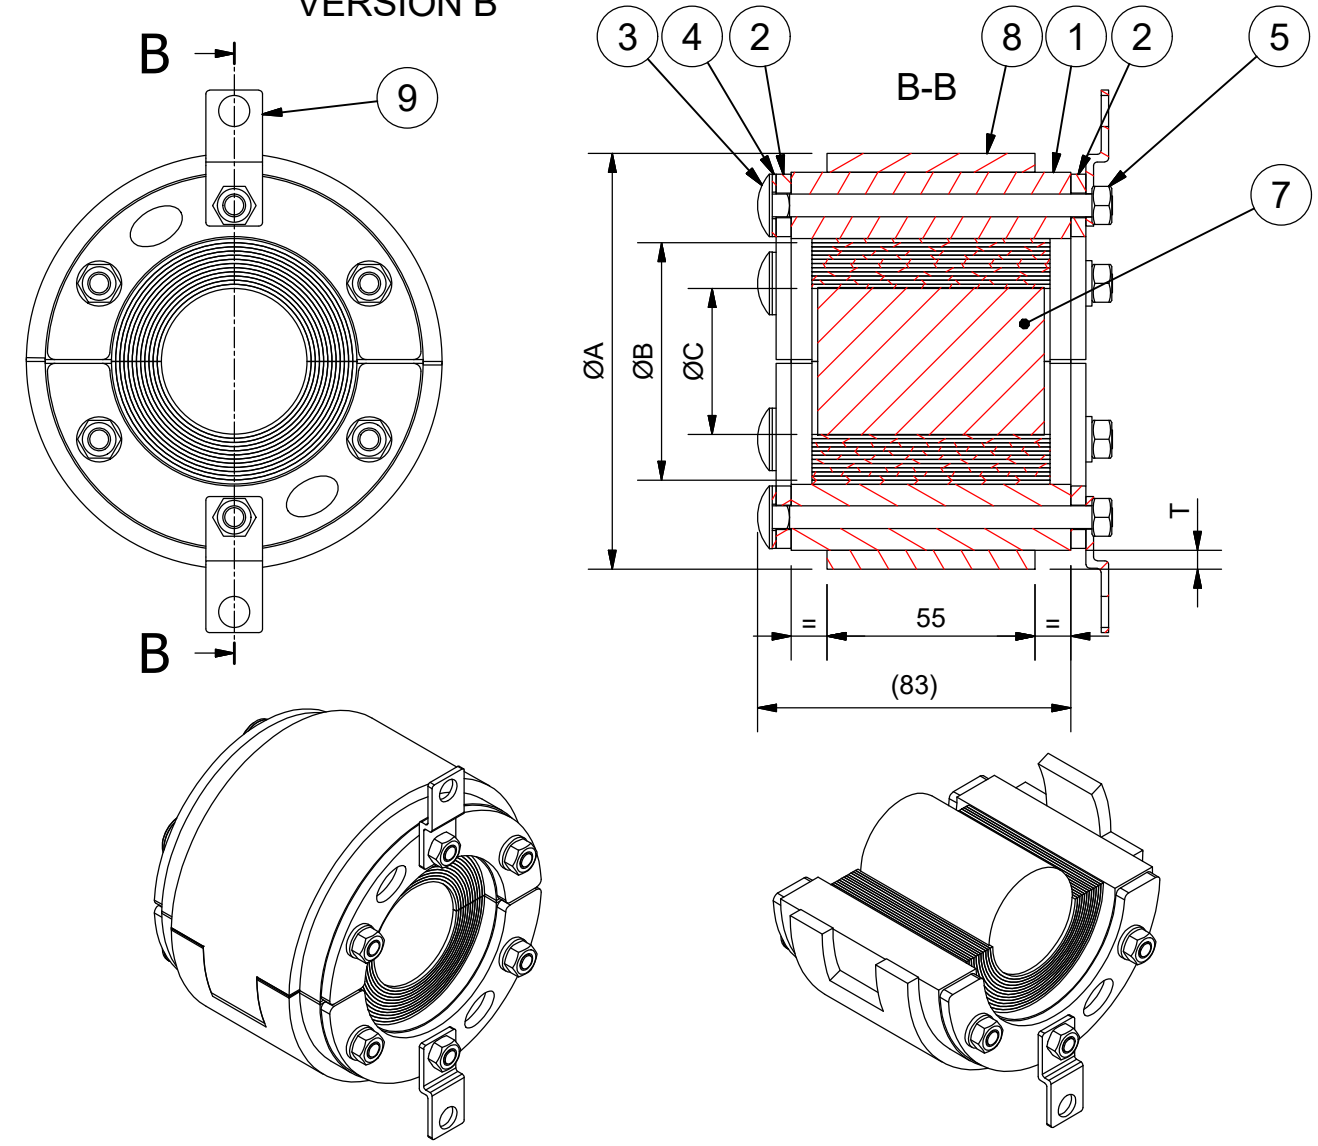

* ALSO AVAILABLE AS WOC VERSION.
WOC VERSION IS WITHOUT CENTER CORE.

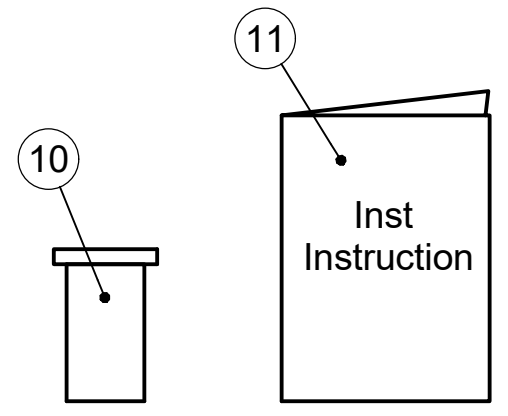

D

11	1	INSTALLATION INSTRUCTION						
10	1	LUBRICANT	10 ml					
9	2	STOP FLANGE	S1020239	0				
8	2	OUTER DIAMETER EXTENSION	ROXYLON HE (NOT ON VERSION A)					
7	1	CORE	ROXYLON (NOT IN WOC VERSIONS)					
6	D-4	WASHER	ISO 7089 M6 A4					
5	D	NUT	ISO 4032 M6 A4					
4	D	GASKET MVBF	M6, EPDM T=1					
3	D	SCREW	DIN 603 MVBF M6x90 A4					
2	4	FITTING	ACID PROOF STAINLESS STEEL					
1	2	RUBBER FRAME	ROXYLON HE					
ITEM	QTY	Designation	Specification	Weight				
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF	Welded details: EN ISO 5817-B EN ISO 10042-B	General surface roughness: Ra 12.5	Designed by/date se-ronpet 2016-04-15	Latest save date 2018-06-21	Format A3	Scale	Sheet no 1 / 1	TotWeight 0,8 kg
 www.roxtec.com			Title RS UG SEALING RS 70-195 UG					Projection method 
			Restricted due to Information drawing		Drawing number S1511690		Rev D	

D	STOP FLANGES ADDED. NAMES CHANGED.	2018-06-18	se-tontor
Rev	Type of revision	Date	Sign