
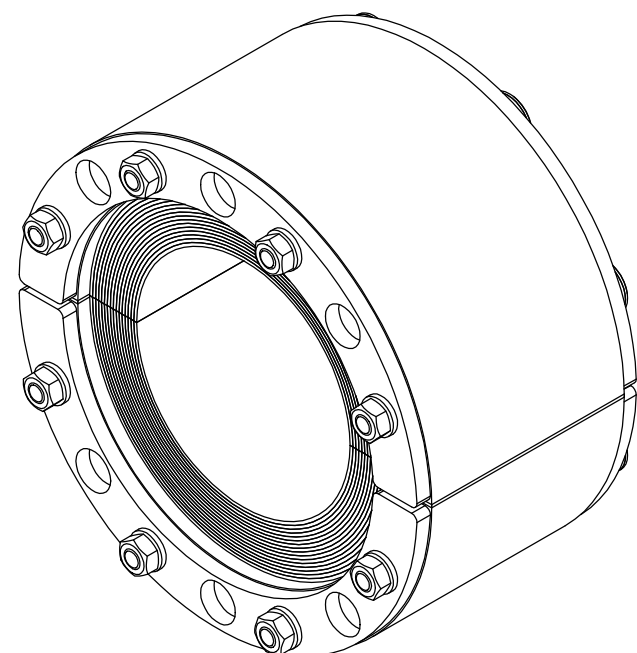
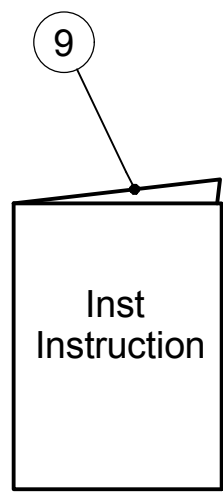
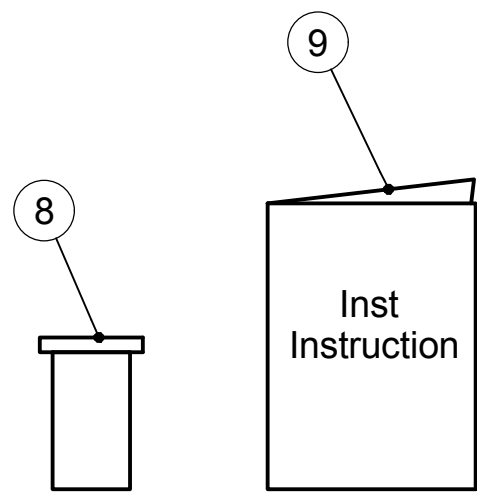
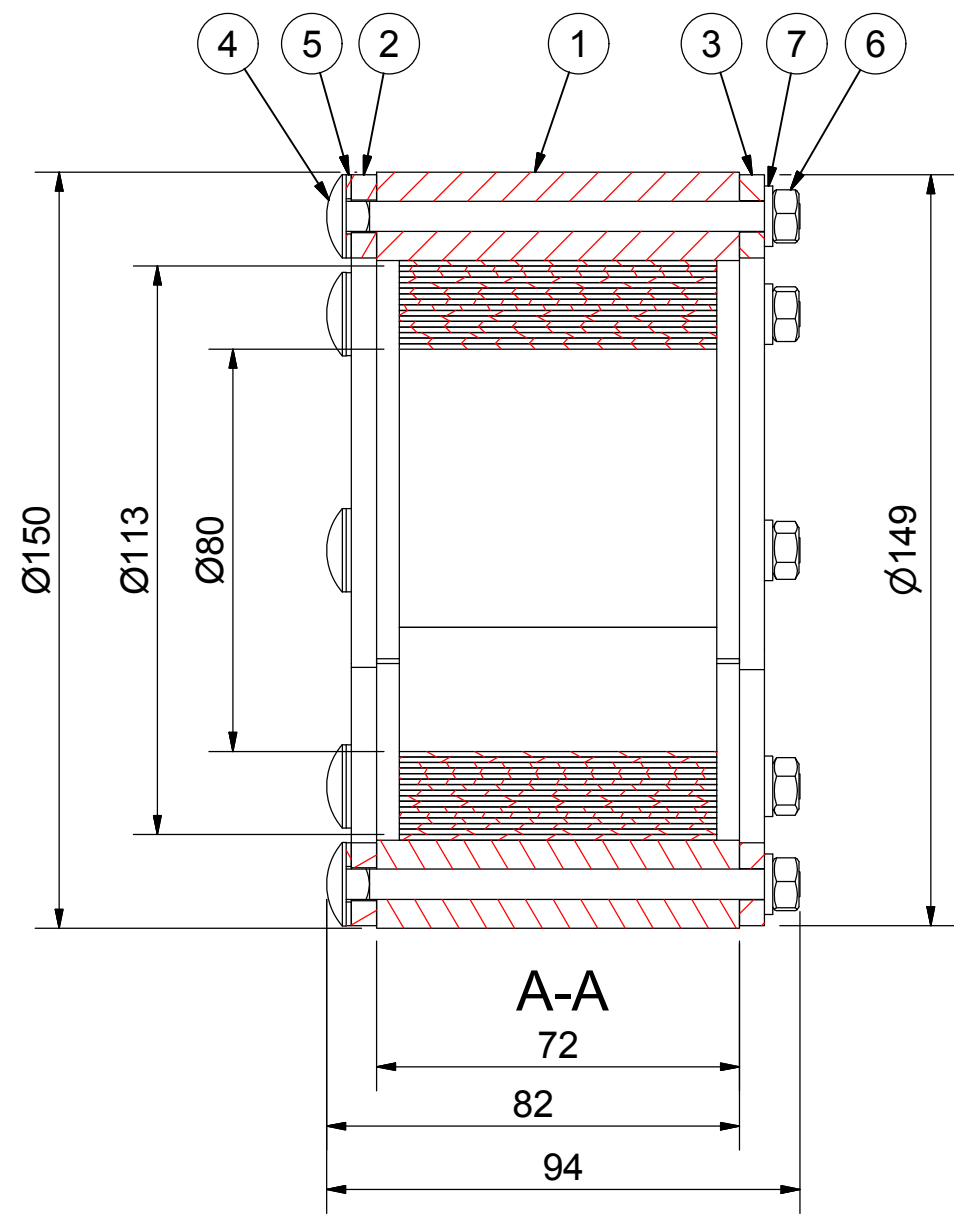


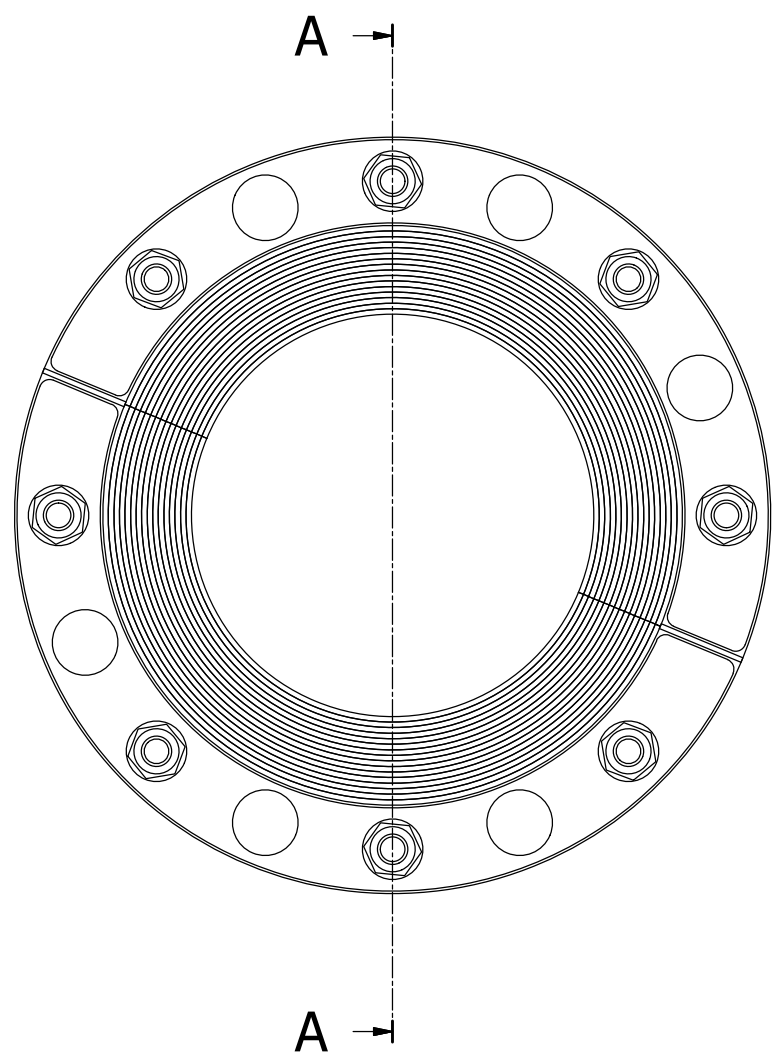

9	1	INSTALLATION INSTRUCTION								
8	1	LUBRICANT	10 ml							
7	8	WASHER	ISO 7089 M6 A4							
6	8	NUT	ISO 4032 M6 A4							
5	8	GASKET MVBF	M6, EPDM T=1							
4	8	SCREW	MVBF M6x90 DIN 603 A4							
3	2	FRONT FITTING	AISI 316, T=5 mm							
2	2	REAR FITTING	AISI 316, T=5 mm							
1	2	RUBBER FRAME	ROXYLON HE							
ITEM	QTY	Designation	Specification			Weight				
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B	General surface roughness: Ra 12.5	Designed by/date se-ronpet 2016-04-15	Latest save date 2016-04-18	Format A3	Scale	Sheet no 1 / 1	TotWeight 1,6 kg	Projection method
		Title RS UG SEALING RS 150 UG INSERTABLE WOC								Rev
www.roxtec.com		Restricted due to Information drawing			Drawing number S1511724		A			

A		2016-04-15	se-ronpet
Rev	Type of revision	Date	Sign