
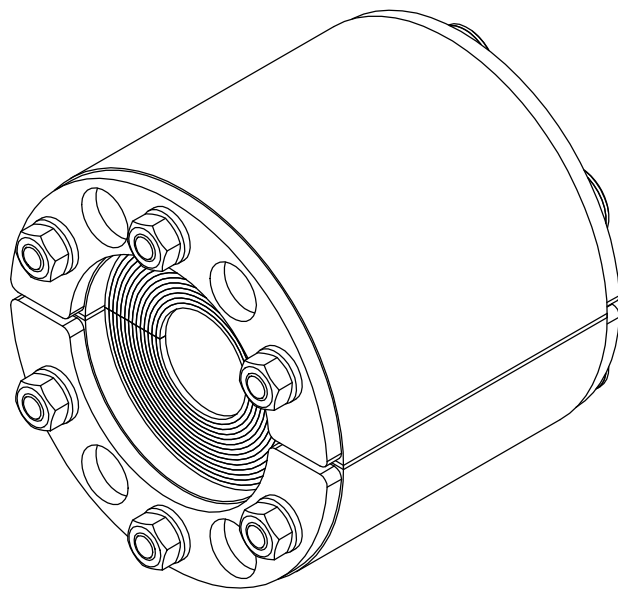
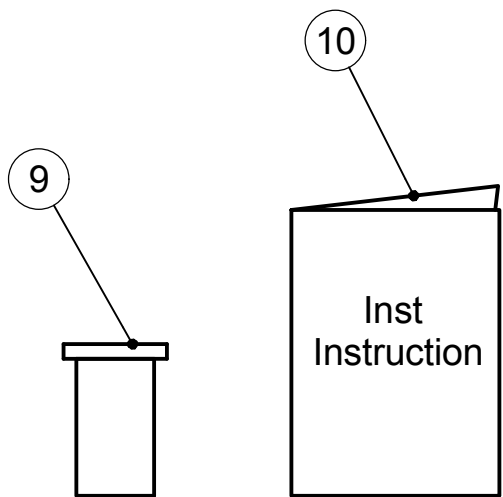
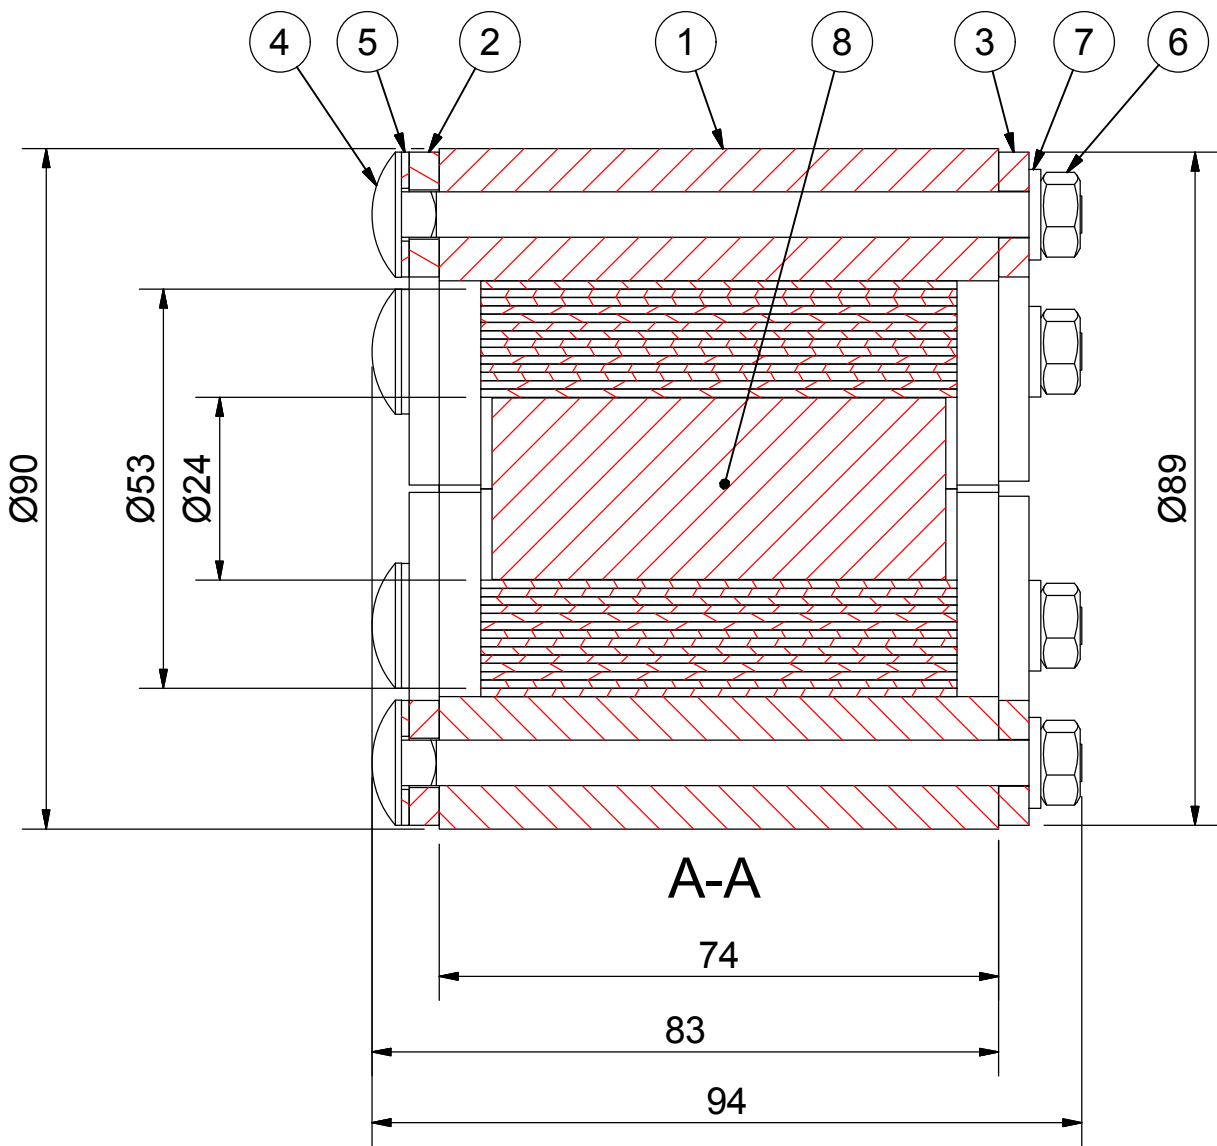


洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

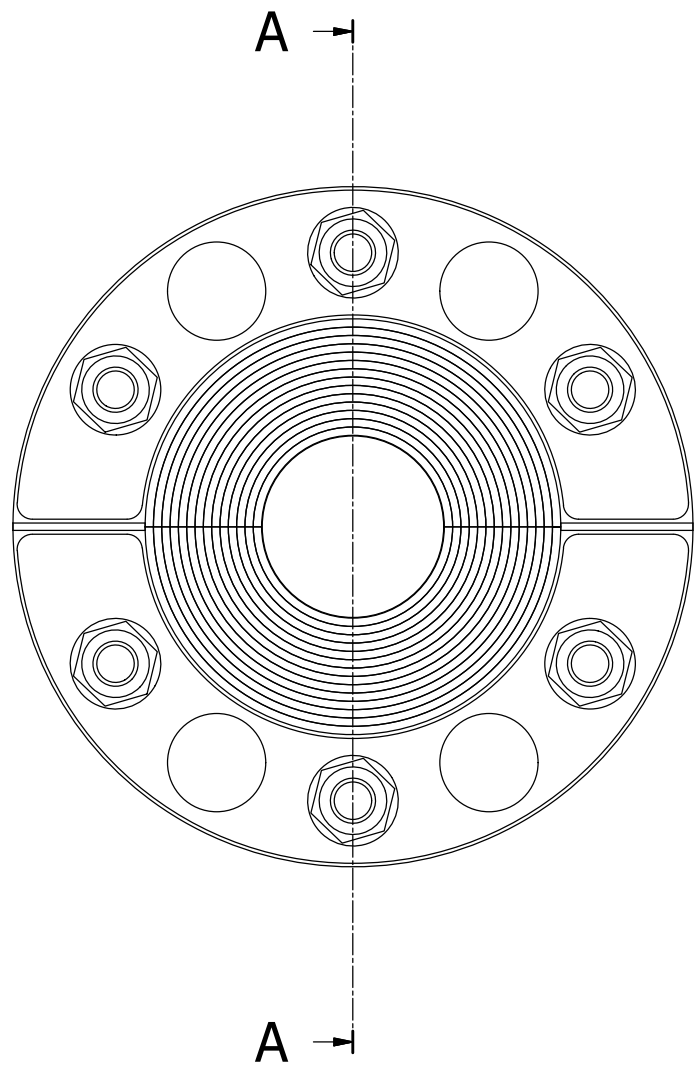

10	1	INSTALLATION INSTRUCTION		
9	1	LUBRICANT	10 ml	
8	1	CORE	ROXYLON	
7	6	WASHER	ISO 7089 M6 A4	
6	6	NUT	ISO 4032 M6 A4	
5	6	GASKET MVBF	M6, EPDM T=1	
4	6	SCREW	DIN 603 MVBF M6x90 A4	
3	2	FRONT FITTING	AISI 316, T=4 mm	
2	2	REAR FITTING	AISI 316, T=4 mm	
1	2	RUBBER FRAME	ROXYLON HE	

ITEM	QTY	Designation	Specification	Weight
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B	General surface roughness: Ra 12.5	Designed by/date se-ronpet 2016-04-18
				Latest save date 2016-04-18
				Format A3
				Scale
				Sheet no 1 / 1
				TotWeight 0,7 kg
				Projection method
				Rev A

A		2016-04-18	se-ronpet
Rev	Type of revision	Date	Sign



Roxtec

www.roxtec.com

RS UG SEALING
RS 90 UG INSERTABLE

Restricted due to
Information drawing

Drawing number

S1511751