We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ©ROXTEC INTERNATIONAL AB

MATERIAL ALUMINIUM

SURFACE TREATMENT ANODIZED

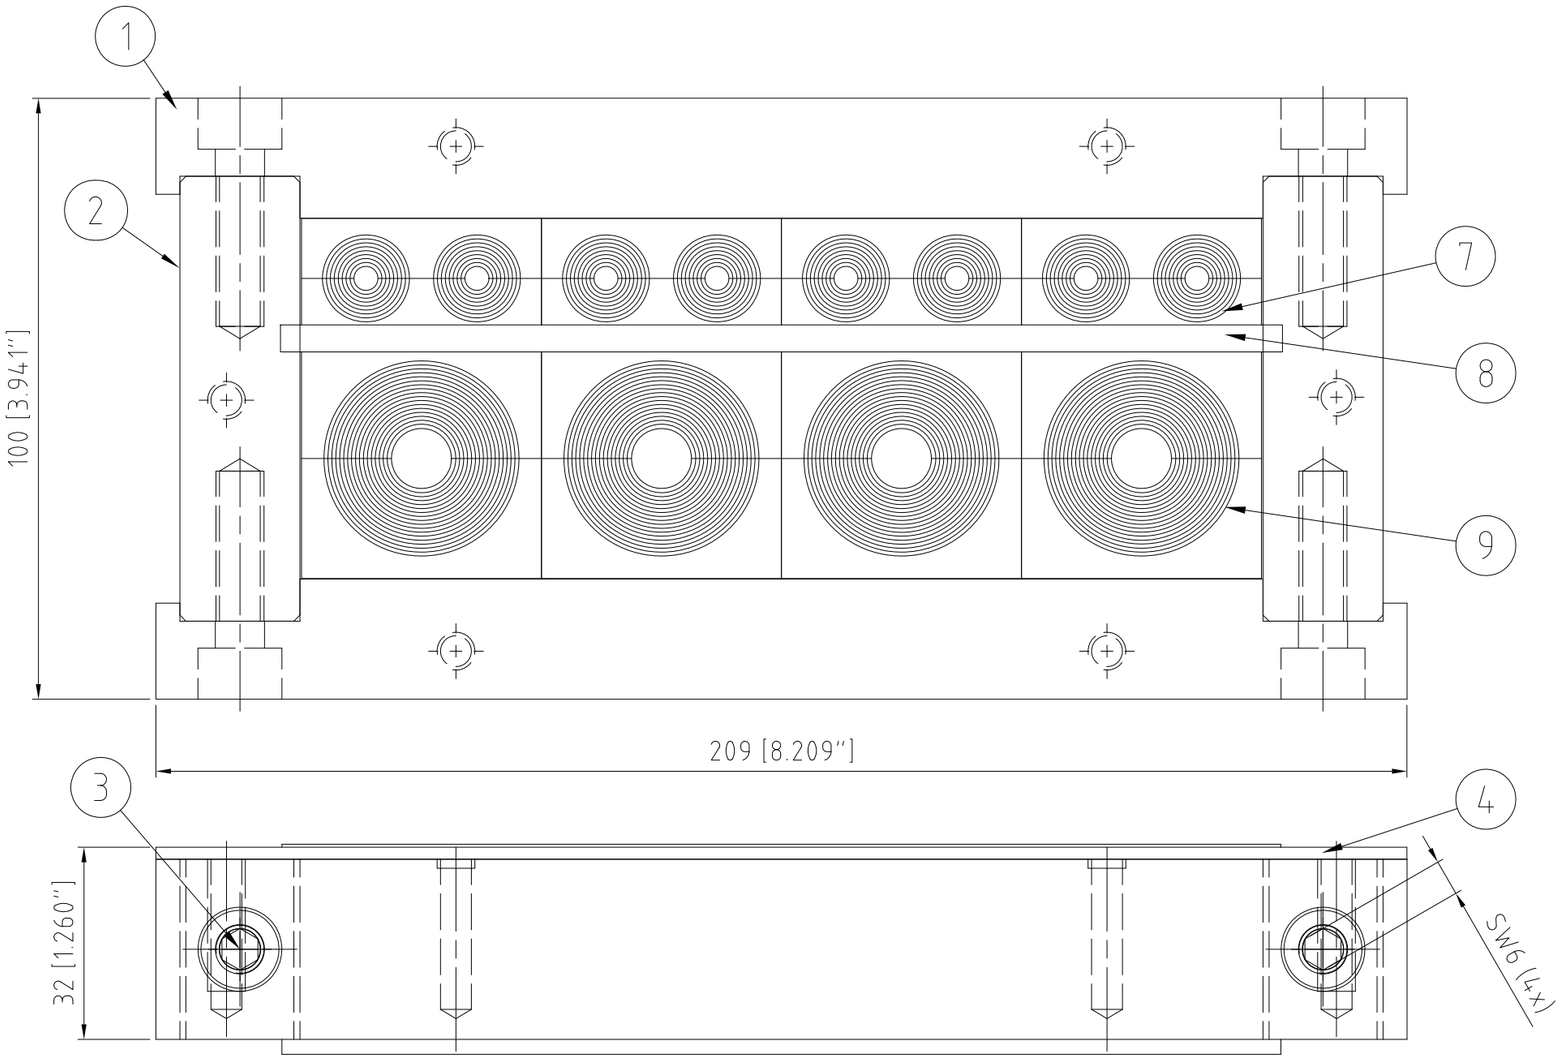

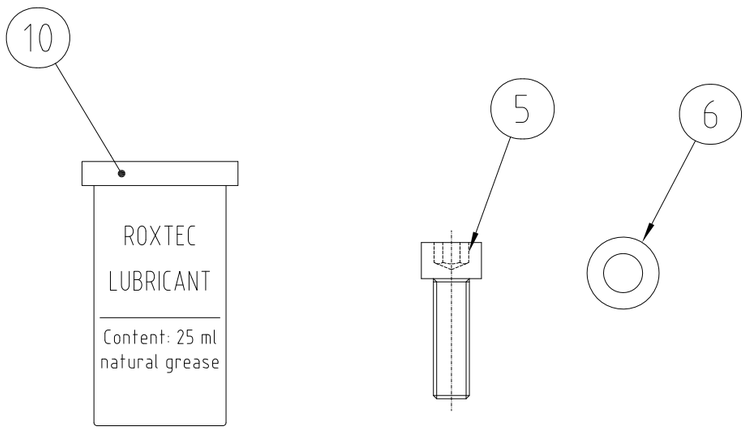

Item	Qty	Designation	Specification	NetWeight
10	1	LUBRICANT	25 ML	–
9	4	CM40 10-32	0+ 9.5-32.5MM.	–
8	1	STAYPLATE	SP 30/160	–
7	4	CM 20w40	0+ 4-16.5MM.	–
6	6	WASHER	BRB M6 A4	–
5	6	SCREW	MC6S M6x20 A4	–
4	1	GASKET	EPDM CELLULAR RUBBER	–
3	4	SCREW	MC6S M8X25 A4	–
2	2	SHORT SIDE		–
1	2	LONG SIDE		–

Rev	Type of revision	Date	Sign
D	STRUCTURE UPDATED	2010-12-07	se-henols

ROXTEC INTERNATIONAL AB
BOX 540 S-371 23 Karlskrona
TEL: +46 455 366700 FAX: +46 455 82012

Designed by: se-joahel
Created Date: 2001-10-10
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF
Welded details: EN ISO 5817-B EN ISO 10042-B
General surface roughness, Ra 12,5: –
TotWeight:
Approved by: se-jorake
Approved Date: 2010-12-07
Title: CF 24/12 ASSEMBLY KIT
Projection method:
Format: A3
Scale: 1:1
Restricted due to: Information Drawing
Drawing number: S1002862
Rev: D