


烙克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev 2.0


RS PE SEALS				
SIZE	A	D	E	RANGE ϕ
RS 43 PE	53	43	1	0+4-23
RS 50 PE	60	50	1	0+8-30
RS 68 PE	78	68	1	0+26-48

RS PE SEALS (WITHOUT CORE)				
SIZE	A	D	E	RANGE ϕ
RS 68 PE WOC	78	68	0	26-48

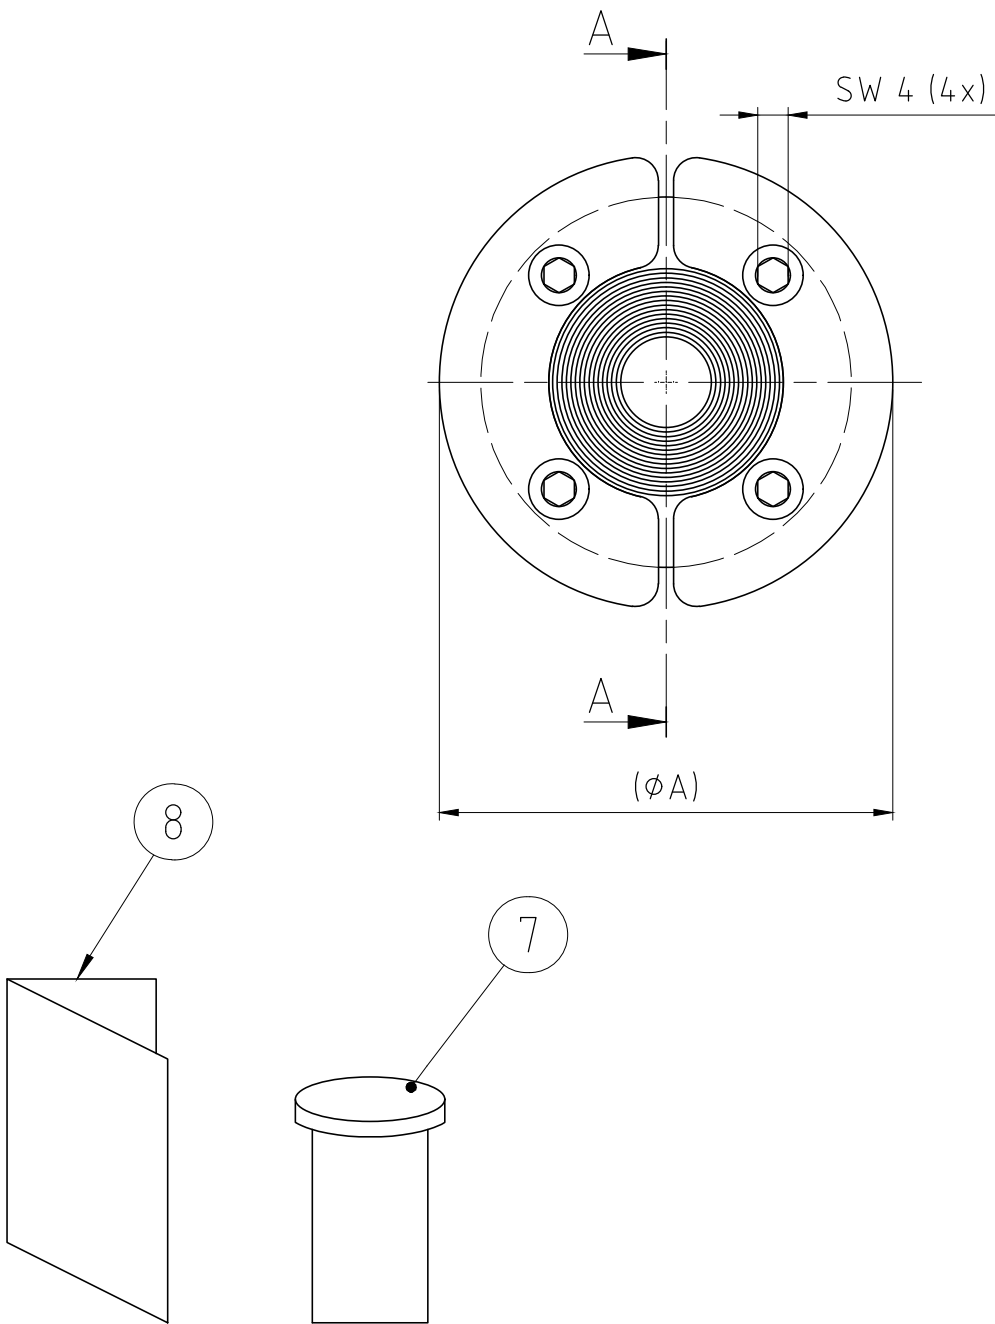

NOTE:

The range of the Rextec Seal indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable mantle.

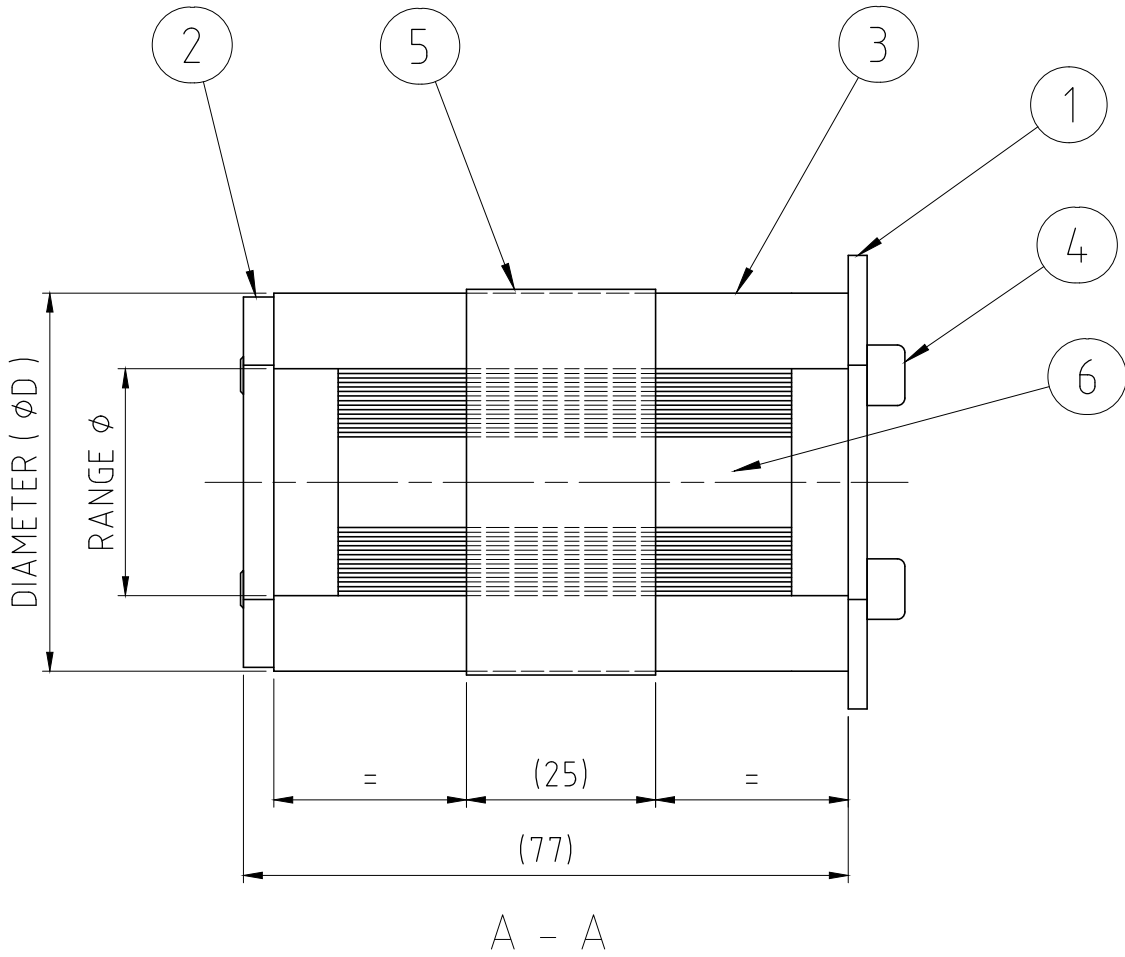

8	1	INSTALLATION INSTRUCTION						
7	1	ROXTEC LUBRICANT	10 ML					
6	E	CORE	ROXYLON					
5	2	CONDUCTIVE TAPE	TIN PLATED COPPER					
4	4	SCREW	MC6S A4					
3	2	RUBBER FRAME	ROXYLON					
2	2	REAR FITTING	ACID PROOF STAINLESS STEEL					
1	2	FRONT FITTING	ACID PROOF STAINLESS STEEL					
Item	Qty	Designation	Specification			NetWeight		
General tolerances used for manufacturing shown in document DOC-002180		Designed by se-joahel	Created Date 2004-01-13	Latest save date 2021-10-18	Format A3	Scale 1:1	Sheet no	TotWeight -
 www.roxtec.com		Title RS PE SEALS RS 43-68 PE						Projection method 
		Restricted due to Information drawing			Drawing number S1005807		Rev D	

Information drawings show general design and nominal dimensions if not else stated