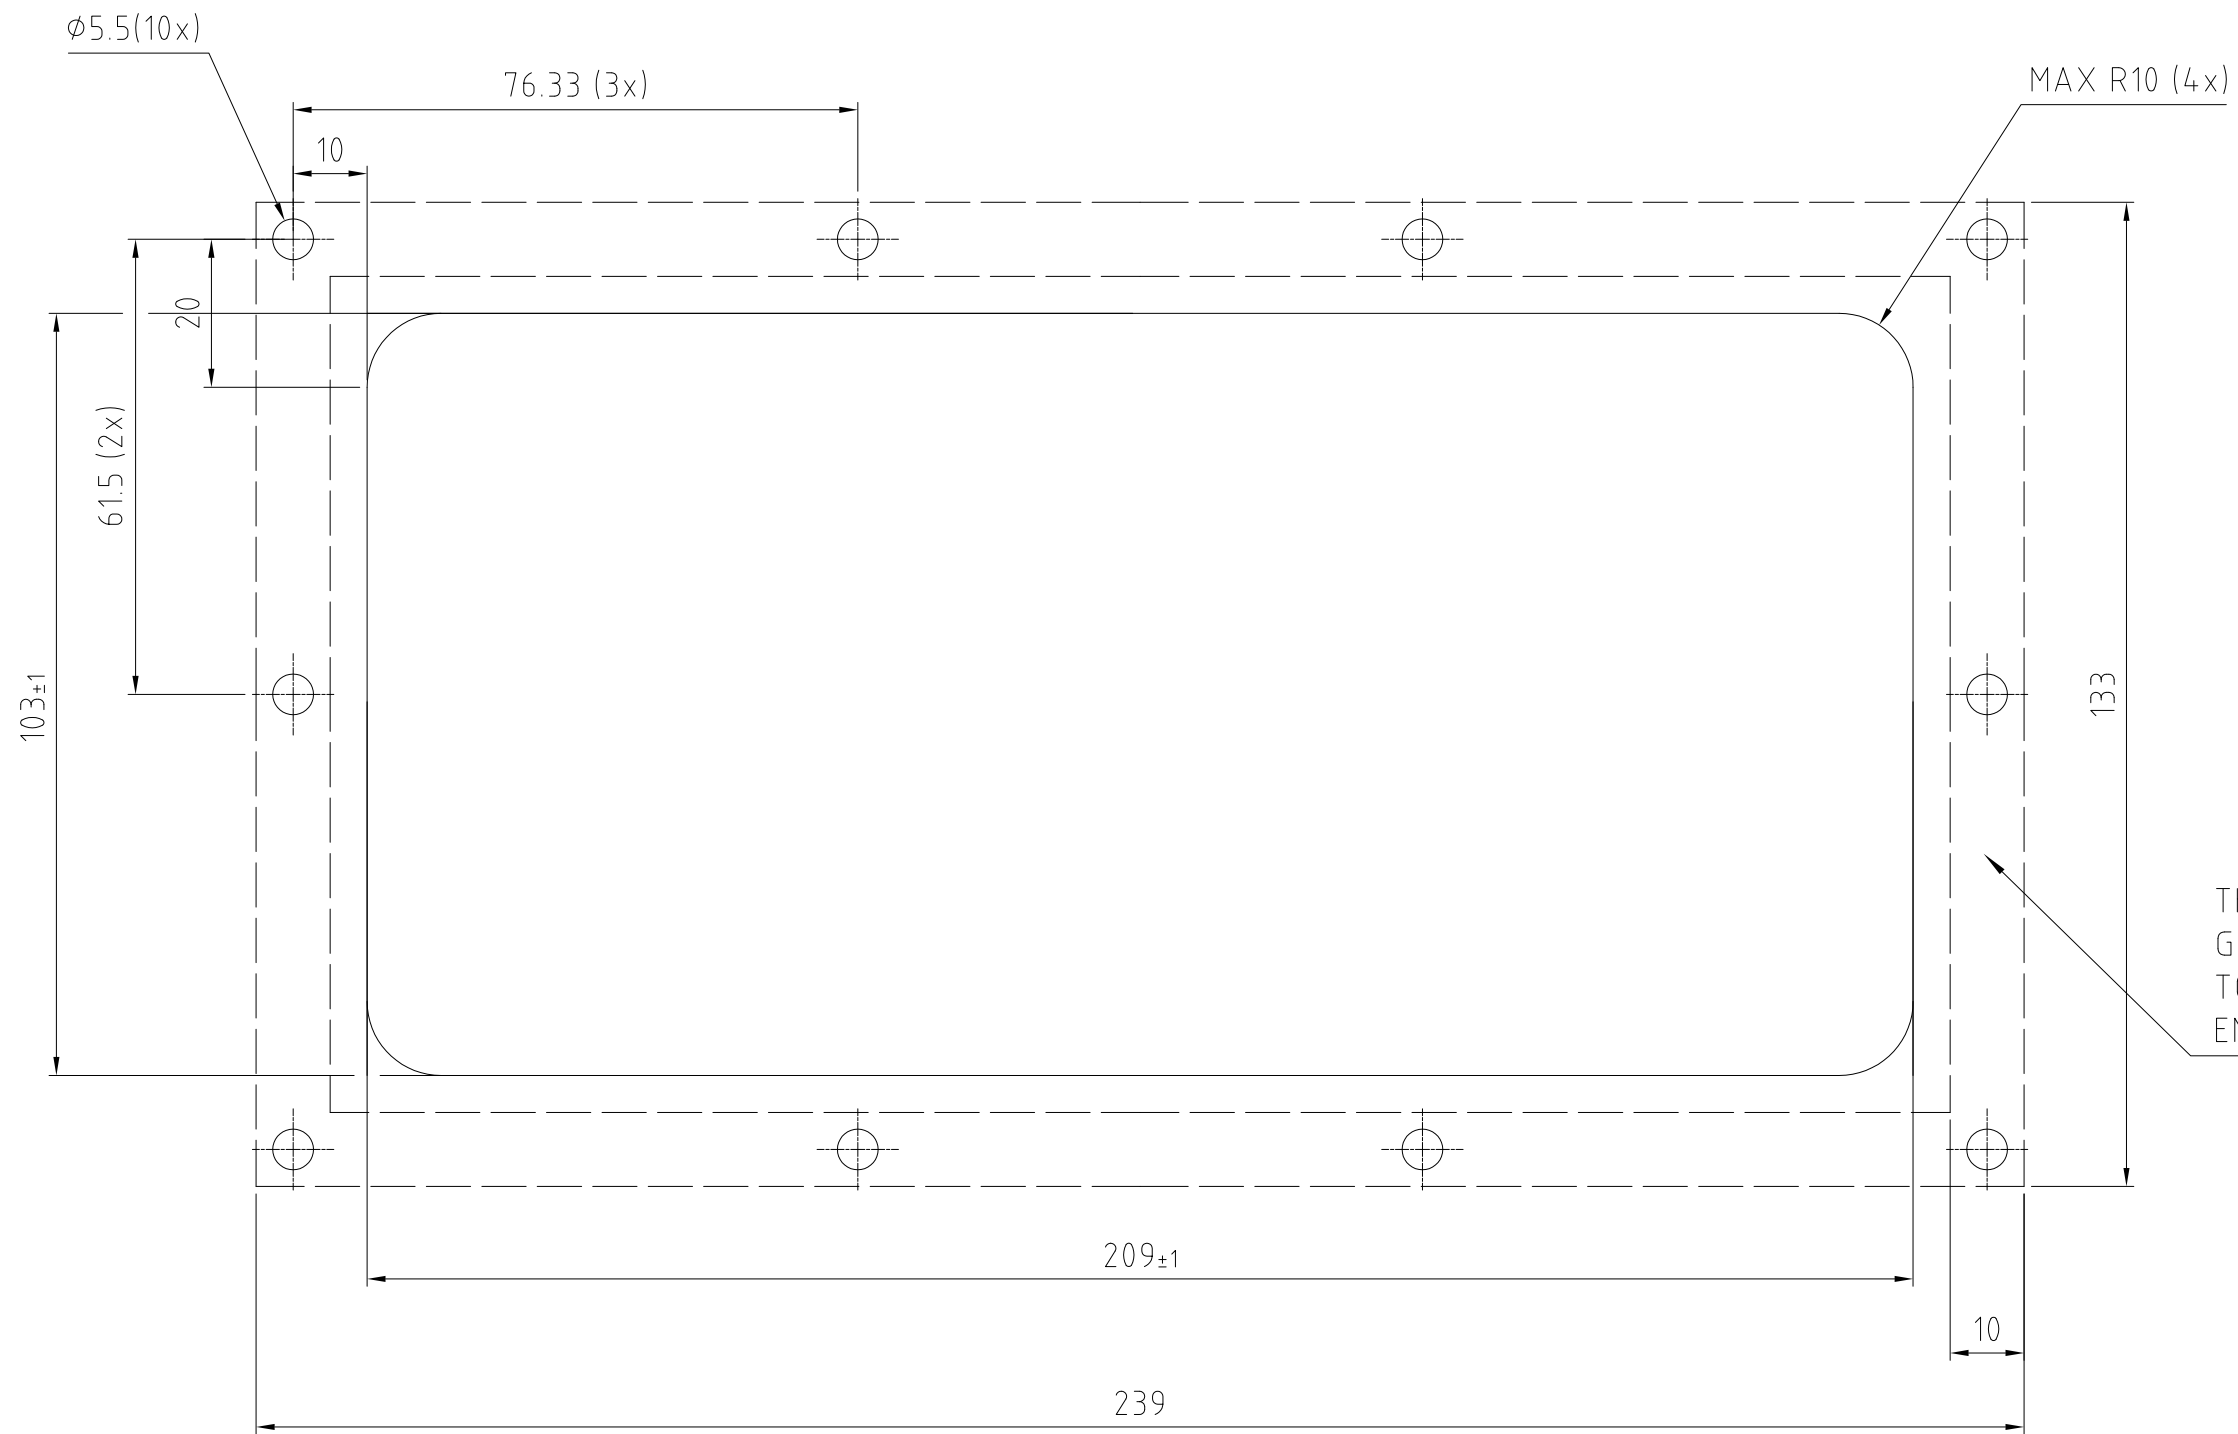




We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ©ROXTEC INTERNATIONAL AB



THIS AREA NEEDS TO BE IN GOOD ELECTRICAL CONTACT TO THE GASKET WHEN USING EMC SOLUTIONS

| | | | |
|-----|------------------------|------------|-----------|
| E | HOLE DIMENSION CHANGED | 2014-08-13 | se-henols |
| Rev | Type of revision | Date | Sign |

| Item | Qty | Designation | Specification | | | | Net Weight |
|--|-----|--|---|--|---|---|--|
| ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012 | | Designed by se-stemil Approved by se-jorake Format A3 Scale Restricted due to Information Drawing | Created Date 2005-09-09 Approved Date 2014-08-13 | General tolerance ISO 2768-1/2-m/K EN ISO 13920-BF | Welded details EN ISO 5817-B EN ISO 10042-B | General surface roughness, Ra 12,5 - | Tot Weight |
|  | | | Title COMSEAL 32 APERTURE DIMENSION | | | | Projection method  |
| | | | Drawing number S1008267 | | | | Rev E |