
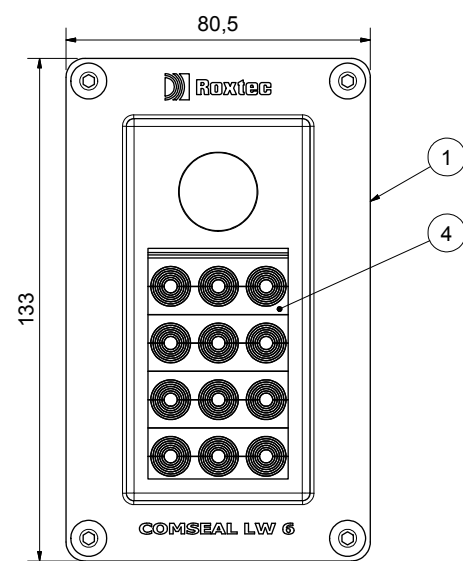
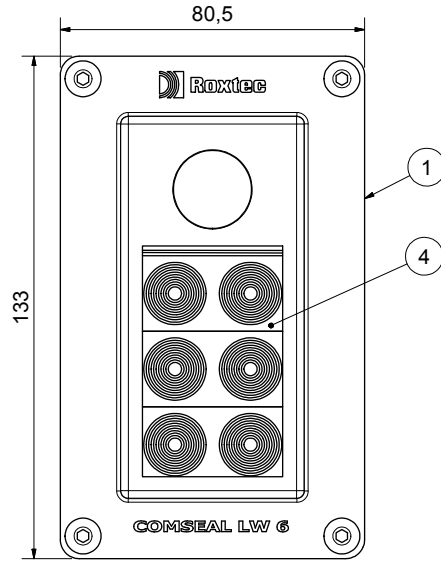
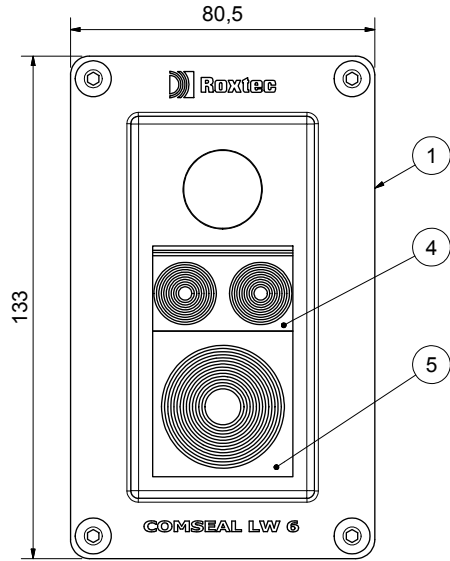



ComSeal LW 6/3			
ITE	QTY	Designation	Specification
1	1	COMSEAL LW 6	POWDER COATED ALUMINIUM
2	1	ASSEMBLY GEL	10 ML
3	1	INSTALLATION INSTRUCTION	
4	1	MODULE	EM 20W40
5	1	MODULE	EM 40 10-32
6	4	SCREW	K6S M5x20 A4-70 NYSEAL
7	4	WASHER	M5 A4 140HV DIN 125
8	4	NUT	M6M M5 A4-70 ISO 4032

ComSeal LW 6/6			
ITEM	QTY	Designation	Specification
1	1	COMSEAL LW 6	POWDER COATED ALUMINIUM
2	1	ASSEMBLY GEL	10 ML
3	1	INSTALLATION INSTRUCTION	
4	3	MODULE	EM20W40
5	-	-	-
6	4	SCREW	K6S M5x20 A4-70 NYSEAL
7	4	WASHER	M5 A4 140HV DIN 125
8	4	NUT	M6M M5 A4-70 ISO 4032

ComSeal LW 6/12			
ITEM	QTY	Designation	Specification
1	1	COMSEAL LW 6	POWDER COATED ALUMINIUM
2	1	ASSEMBLY GEL	10 ML
3	1	INSTALLATION INSTRUCTION	
4	4	MODULE	EM 15w40
5	-	-	-
6	4	SCREW	K6S M5x20 A4-70 NYSEAL
7	4	WASHER	M5 A4 140HV DIN 125
8	4	NUT	M6M M5 A4-70 ISO 4032



B	POS 6,7,8 CHANGED	2014-08-13	se-henols
Rev	Type of revision	Date	Sign

ROXTEC INTERNATIONAL AB Box 540, S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012	Designed by se-henols	Designed Date 2012-06-11	General tolerance ISO 2768-12 mK EN ISO 13020-01	Welder details EN ISO 10042-B	General surface roughness, Ra 12,5	FootWeight
	Approved by se-jorake	Approved Date 2014-08-22	Title COMSEAL LW 6		Projection method	
Format A2		Scale 1:-	Drawing number S1027734		Rev B	
Restricted due to		Information Drawing				