


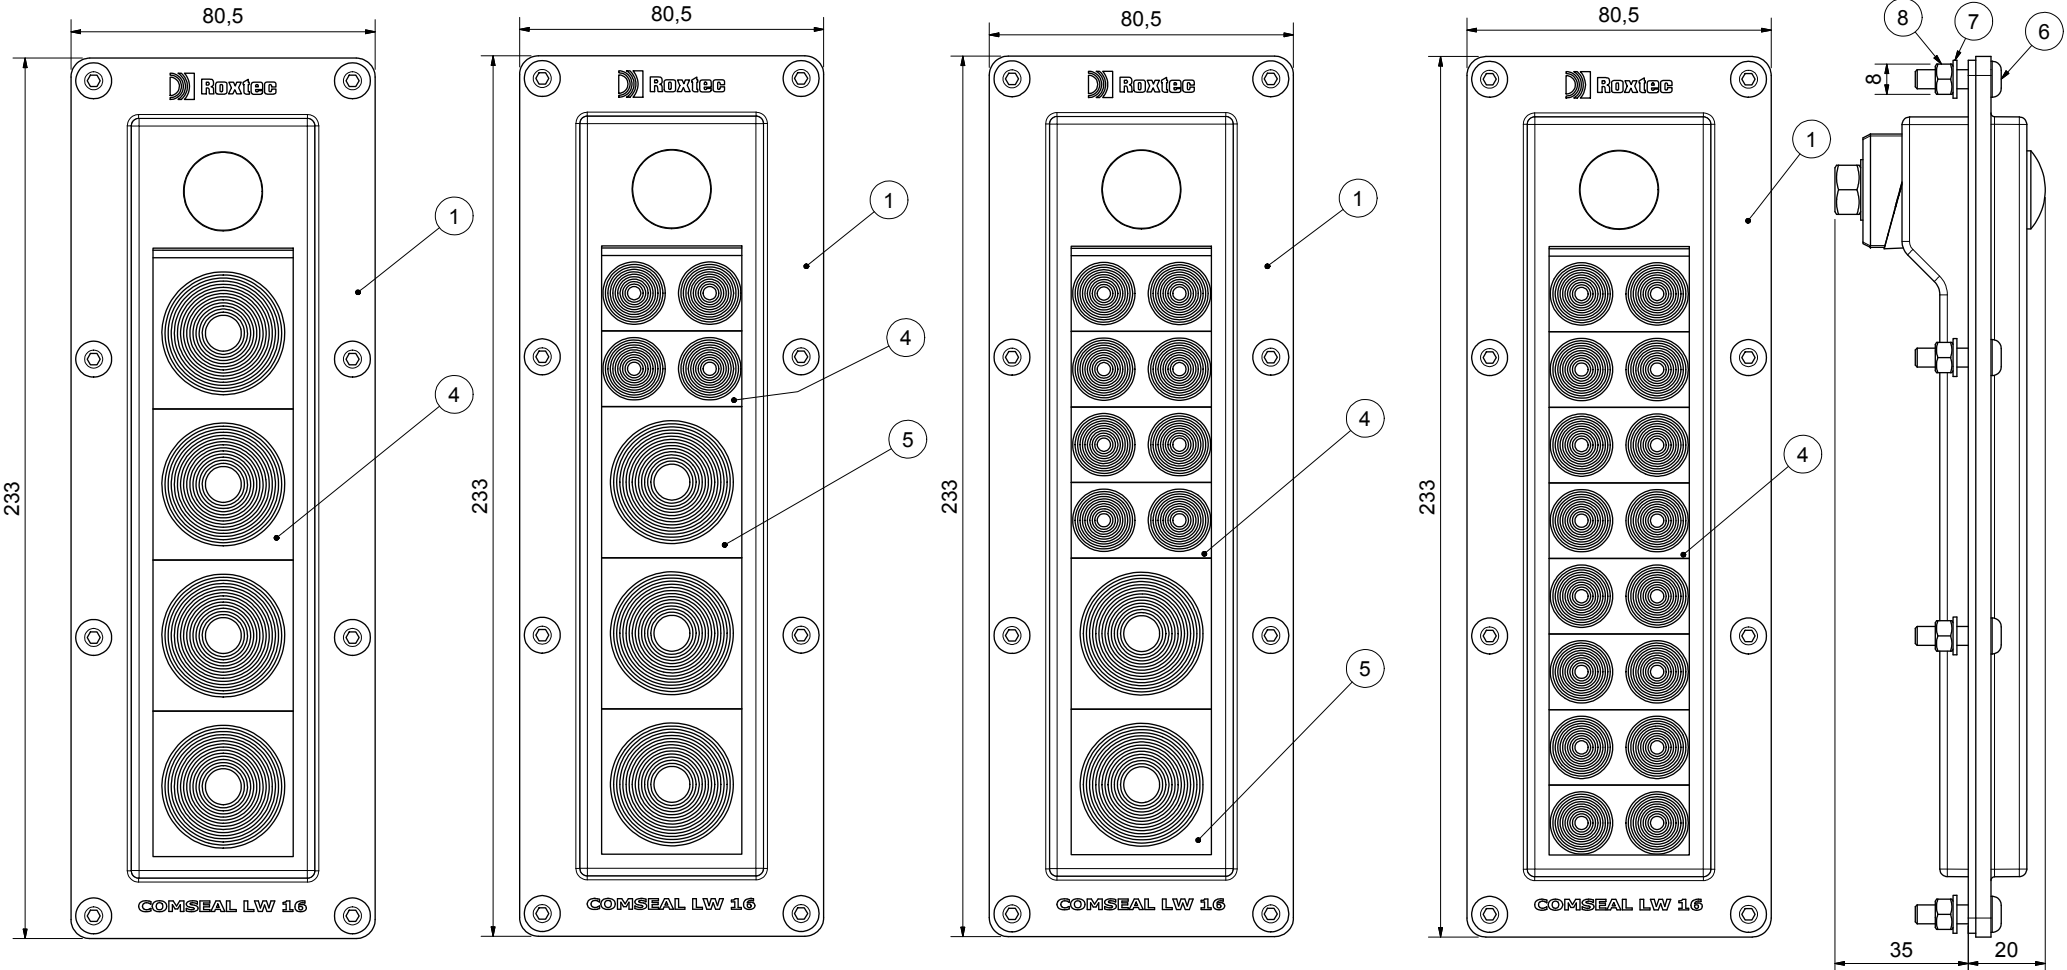


ComSeal LW 16/4			
ITEM	QTY	Designation	Specification
1	1	COMSEAL LW 16 FRAME	POWDER COATED ALU
2	1	ASSEMBLY GEL	10 ML
3	1	INSTALLATION INSTRUCTION	
4	4	MODULE	EM 40 10-32
5	-	-	-
6	6	SCREW	K6S M5x20 A4-70 NYSEAL
7	6	WASHER	M5 A4 140HV DIN125
8	6	NUT	M6M M5 A4-70 ISO4032

ComSeal LW 16/7			
ITEM	QTY	Designation	Specification
1	1	COMSEAL LW 16 FRAME	POWDER COATED ALU
2	1	ASSEMBLY GEL	10 ML
3	1	INSTALLATION INSTRUCTION	
4	2	MODULE	EM20W40
5	3	MODULE	EM 40 10-32
6	6	SCREW	K6S M5x20 A4-70 NYSEAL
7	6	WASHER	M5 A4 140HV DIN125
8	6	NUT	M6M M5 A4-70 ISO4032

ComSeal LW 16/10			
ITEM	QTY	Designation	Specification
1	1	Comseal LW 16 FRAME	POWDER COATED ALU
2	1	ASSEMBLY GEL	10 ML
3	1	INSTALLATION INSTRUCTION	
4	4	MODULE	EM20W40
5	2	MODULE	EM 40 10-32
6	6	SCREW	K6S M5x20 A4-70 NYSEAL
7	6	WASHER	M5 A4 140HV DIN125
8	6	NUT	M6M M5 A4-70 ISO4032

ComSeal LW 16/16			
ITEM	QTY	Designation	Specification
1	1	COMSEAL LW 16	POWDER COATED ALU
2	1	ASSEMBLY GEL	10 ML
3	1	INSTALLATION INSTRUCTION	
4	8	MODULE	EM20W40
5	-	-	-
6	6	SCREW	K6S M5x20 A4-70 NYSEAL
7	6	WASHER	M5 A4 140HV DIN125
8	6	NUT	M6M M5 A4-70 ISO4032



B	POS 6,7,8 CHANGED	2014-08-18	se-henols
Rev	Type of revision	Date	Sign

ROXTEC INTERNATIONAL AB Box 540, S-371 23 Karlensborg TEL: +46 455 366700 FAX: +46 455 82012	Designed by se-henols	Designed Date 2012-06-13	General tolerance ISO 2768-12 mK EN ISO 13020-01	Detail details EN ISO 18462-B	General surface roughness, Ra 12.5	FootWeight
	Approved by se-lorake	Approved Date 2014-08-22	Title COMSEAL LW 16 KITS		Projection method	Rev B
Format A2		Scale 1:-	Drawing number S1027783		Information Drawing	

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

格克塞克保留所有权利。未经授权严禁复制，使用以及向第三方披露。