
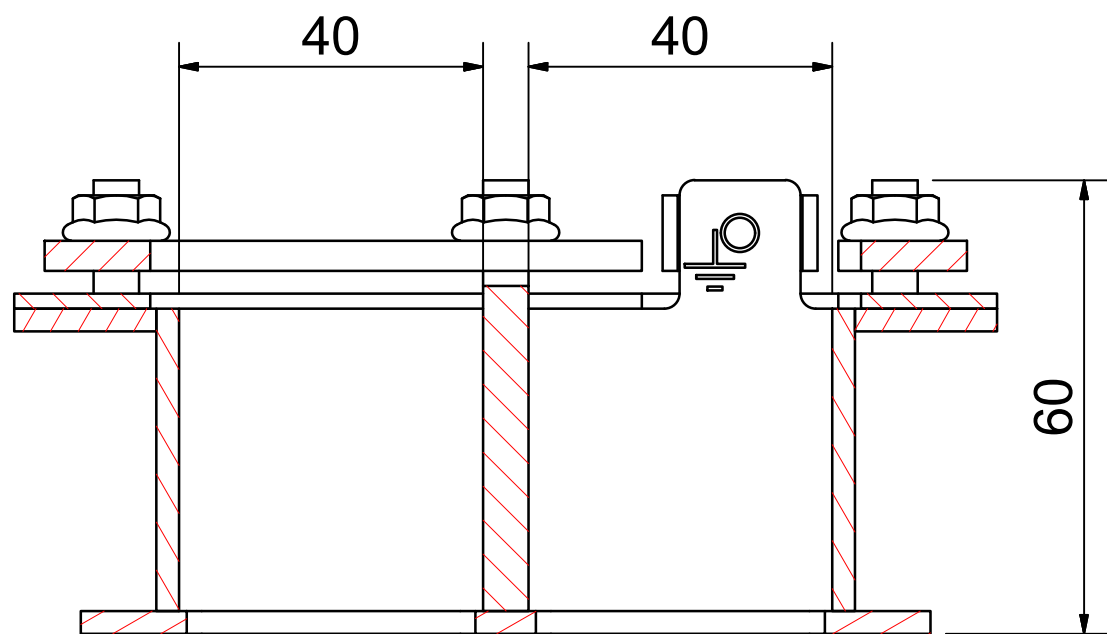
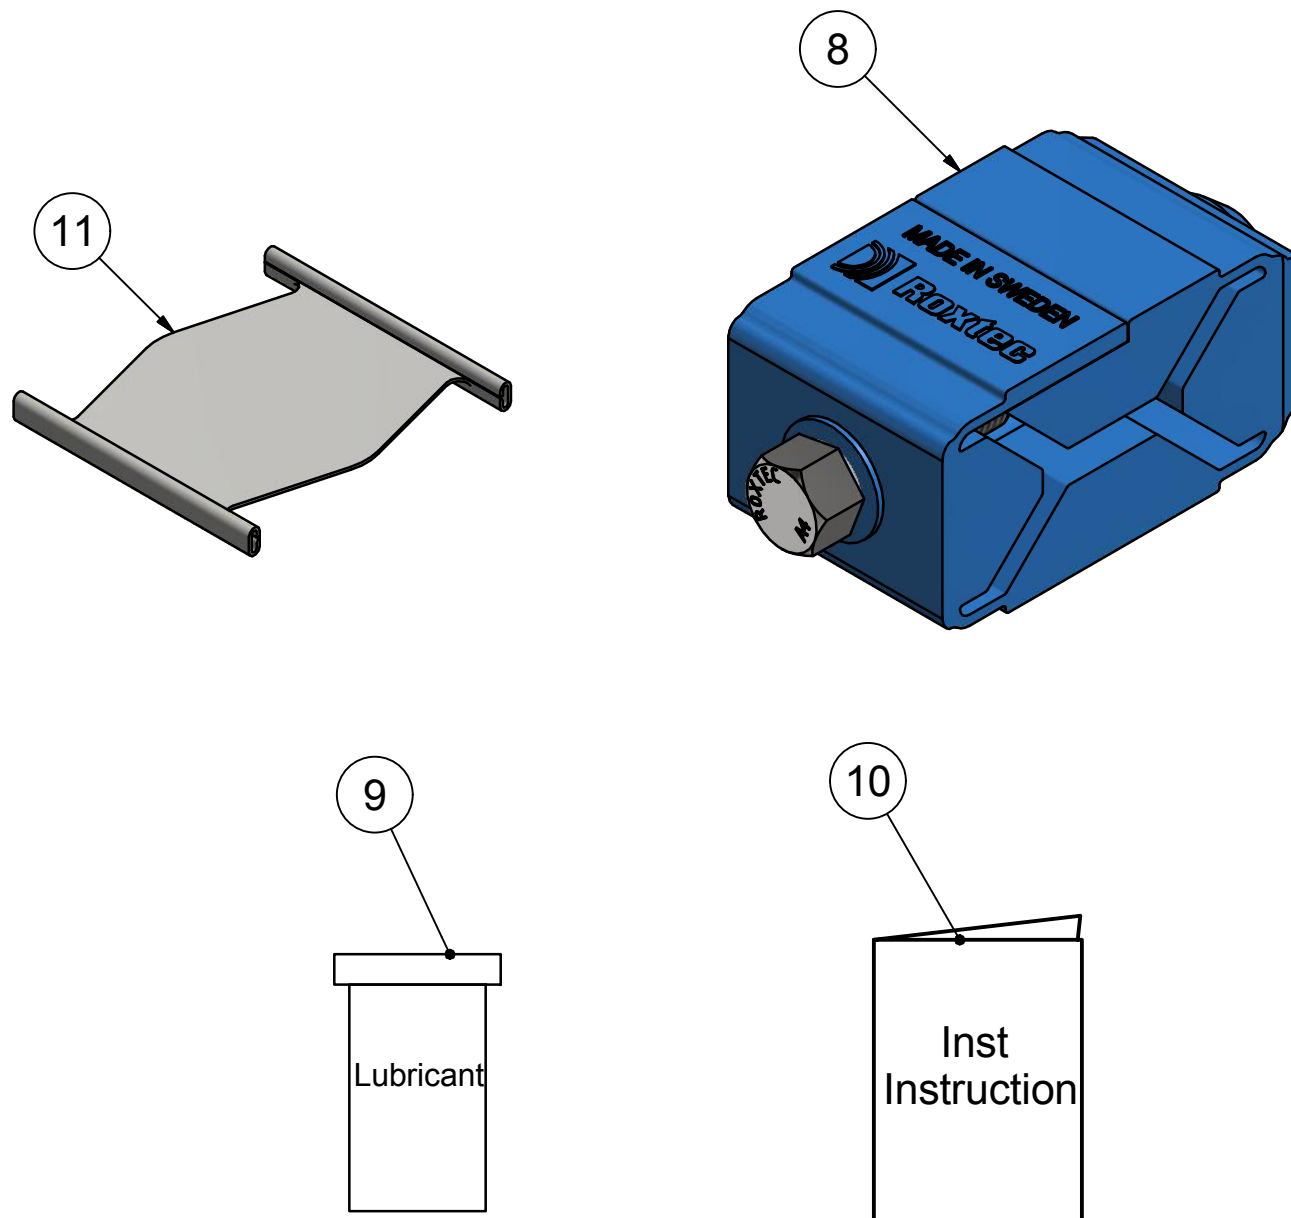
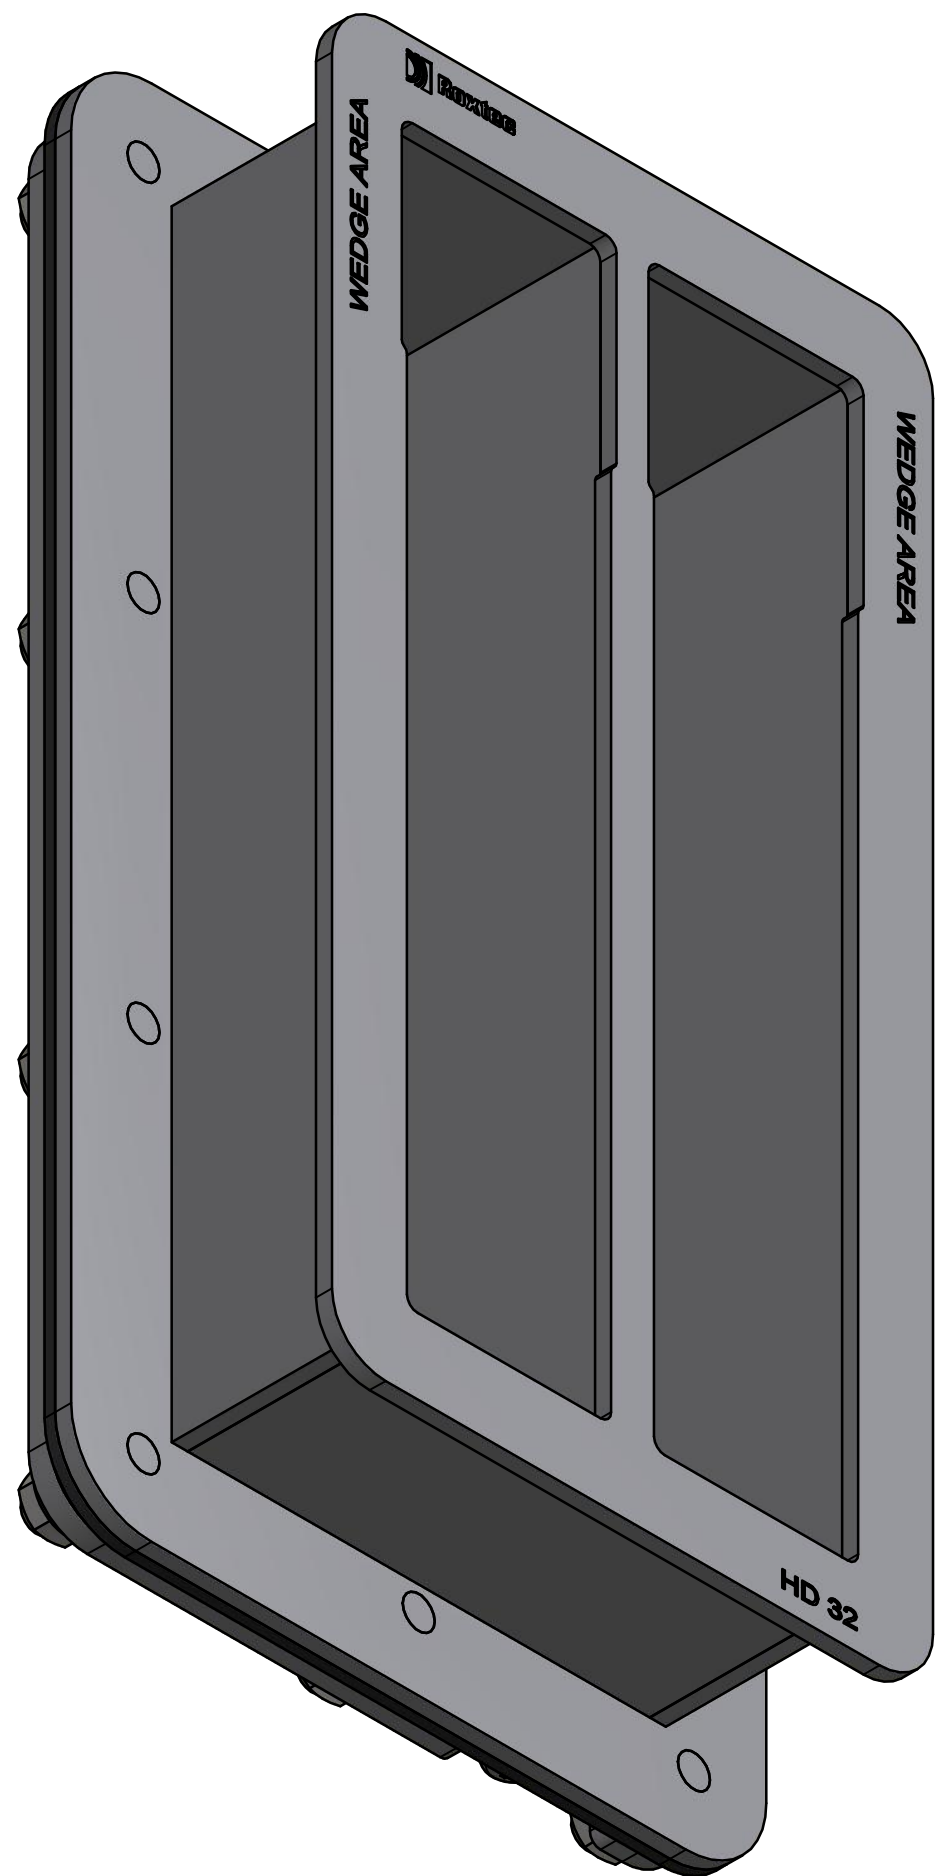
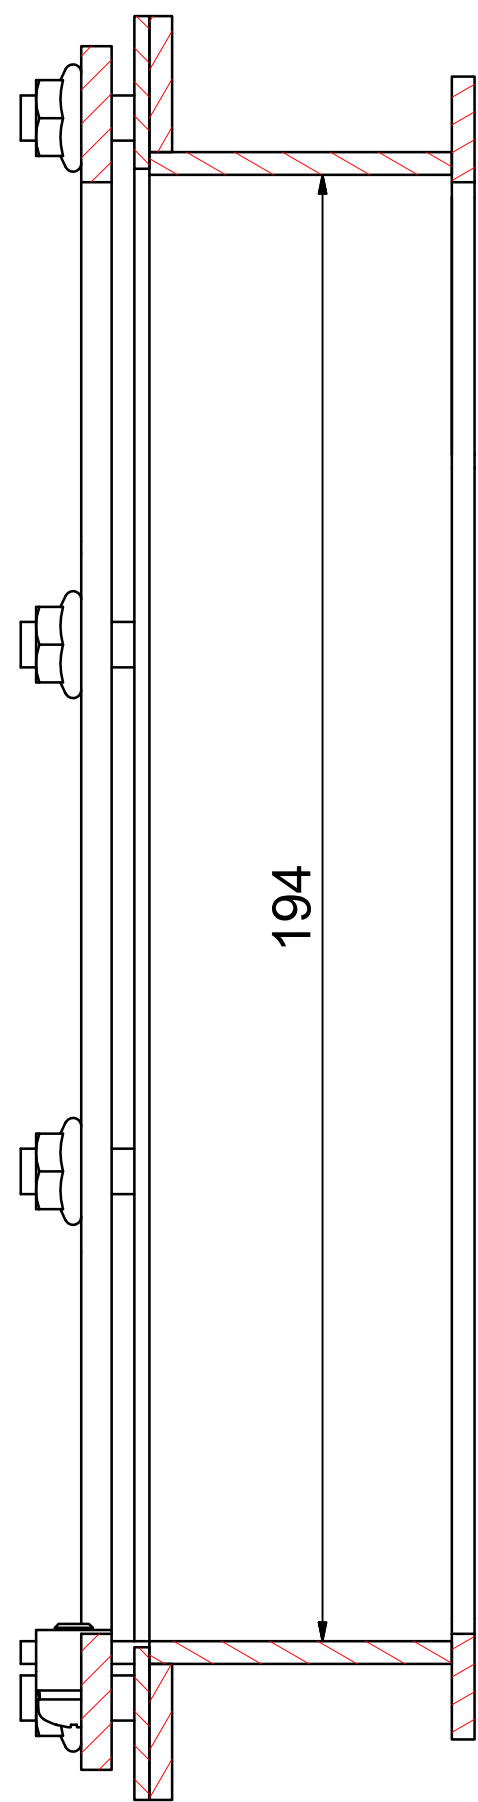


格克萊克保留所有權利。未經授權嚴禁复制，使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

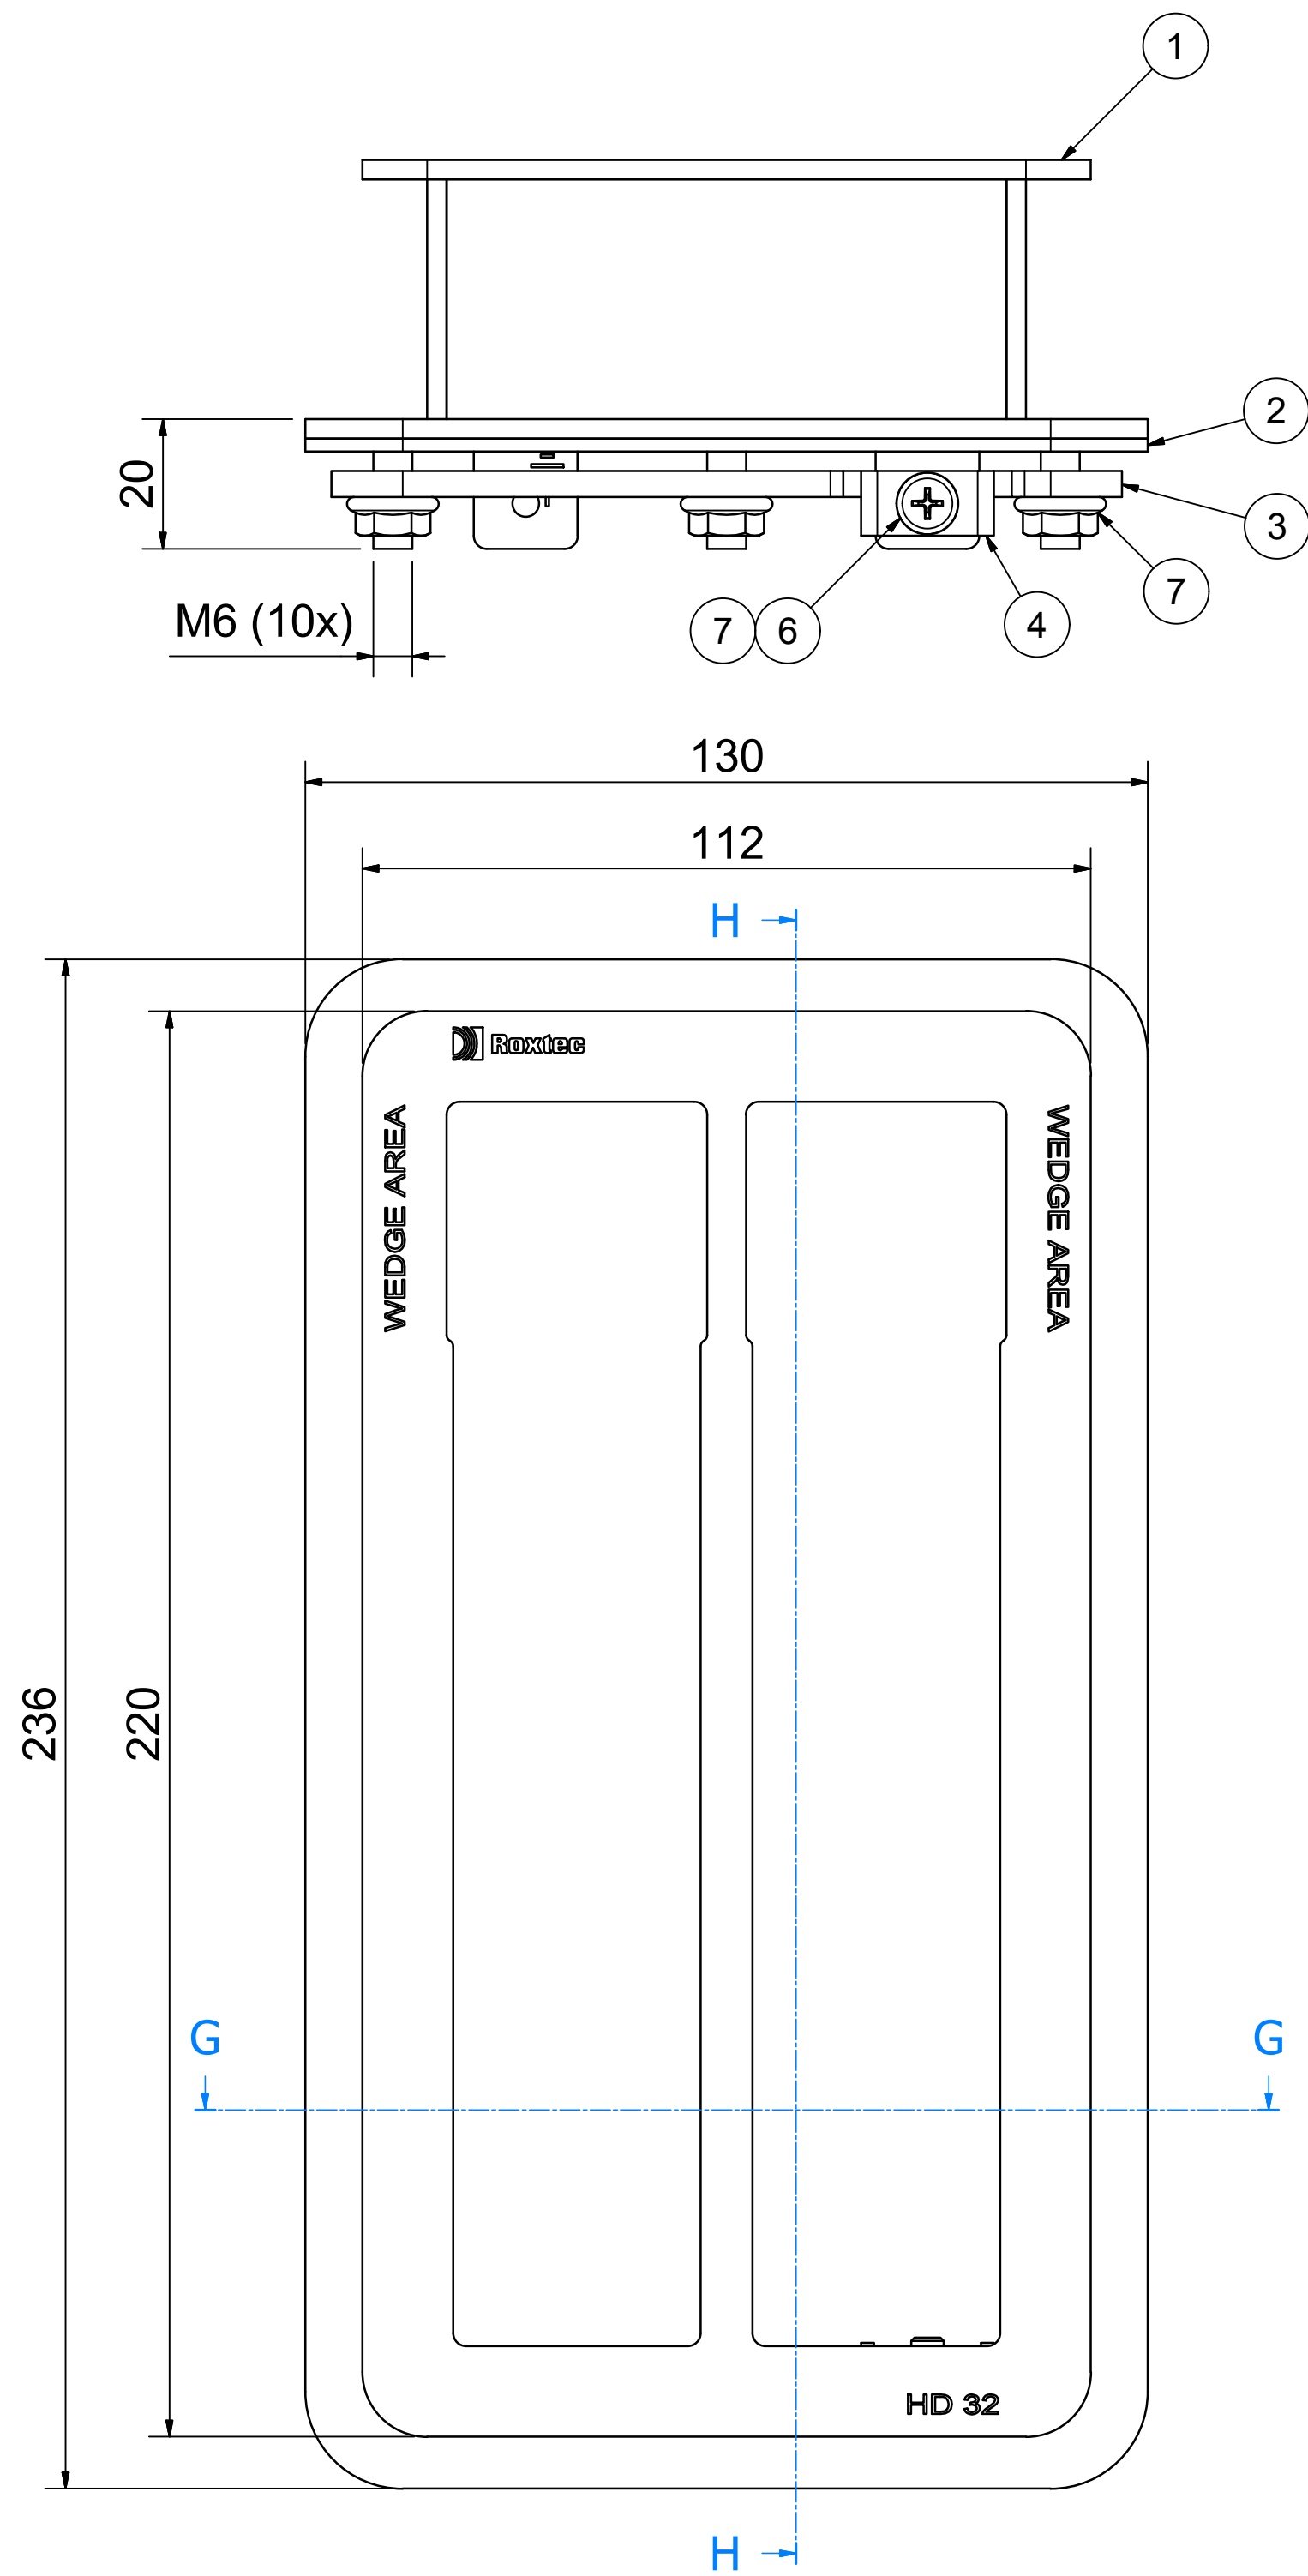

PACKING SPACE FOR MODULES:
40x160 (1.575"x6.299") in two compartments

11	2	STAYPLATE 40 HD	ACID PROOF STAINLESS STEEL	
10	1	INSTALLATION INSTRUCTION		
9	1	LUBRICANT	25 ml	
8	2	C WEDGE HD AISI316		
7	10	FLANGED NUT	M6 SERRATED, A4	
6	1	SCREW	M5x10, A4	
5	1	SPRING WASHER	M5, A4	
4	1	SADDLE WASHER	ACID PROOF STAINLESS STEEL	
3	2	COUNTER FRAME	ACID PROOF STAINLESS STEEL	
2	1	GASKET	EPDM CELLULAR RUBBER	
1	1	HD32 FRAME	ACID PROOF STAINLESS STEEL	
ITE QTY		Designation	Specification	
General tolerance: ISO 2768-Ms EN ISO 13850-BF		Material design: EN ISO 9817-8 EN ISO 10562-B	General surface roughness: Ra 12.5	Weight
Title: HD32 FRAME ASSEMBLY		Designed by/date: se-henols 2013-05-02	Latest save date: 2016-05-31	Format: A1
www.roxtec.com		Information drawing	Scale: 1 / 1	Sheet no: 1 / 1
Drawing number: S1032869		Rev: C	Projection method: 1st angle	

C		2016-05-31	se-danstr
Rev	Type of revision	Date	Sign