
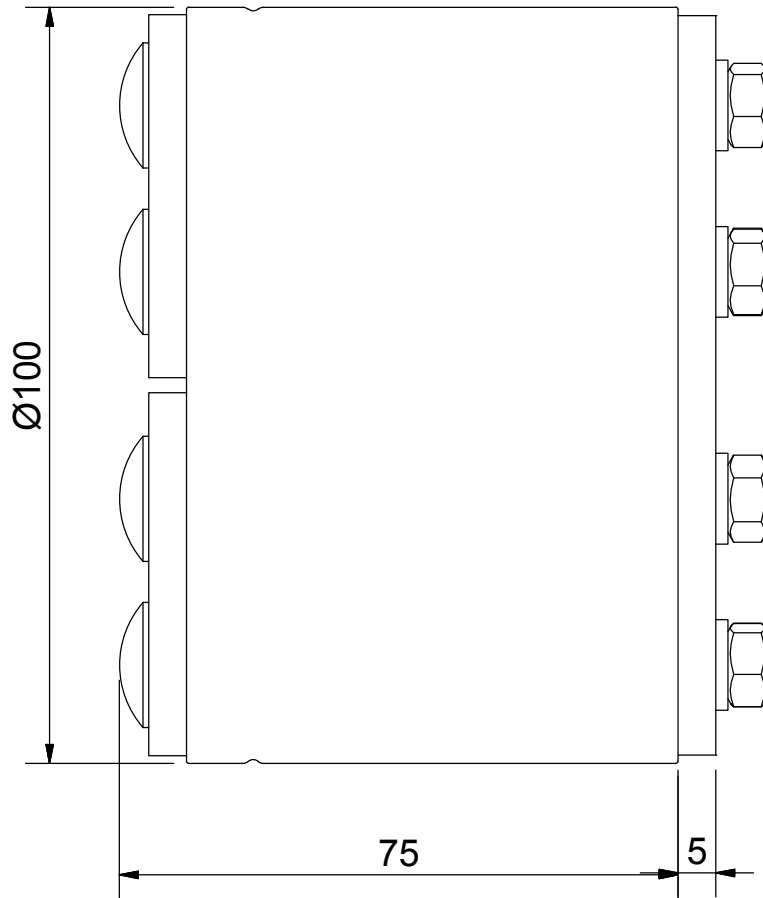



洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

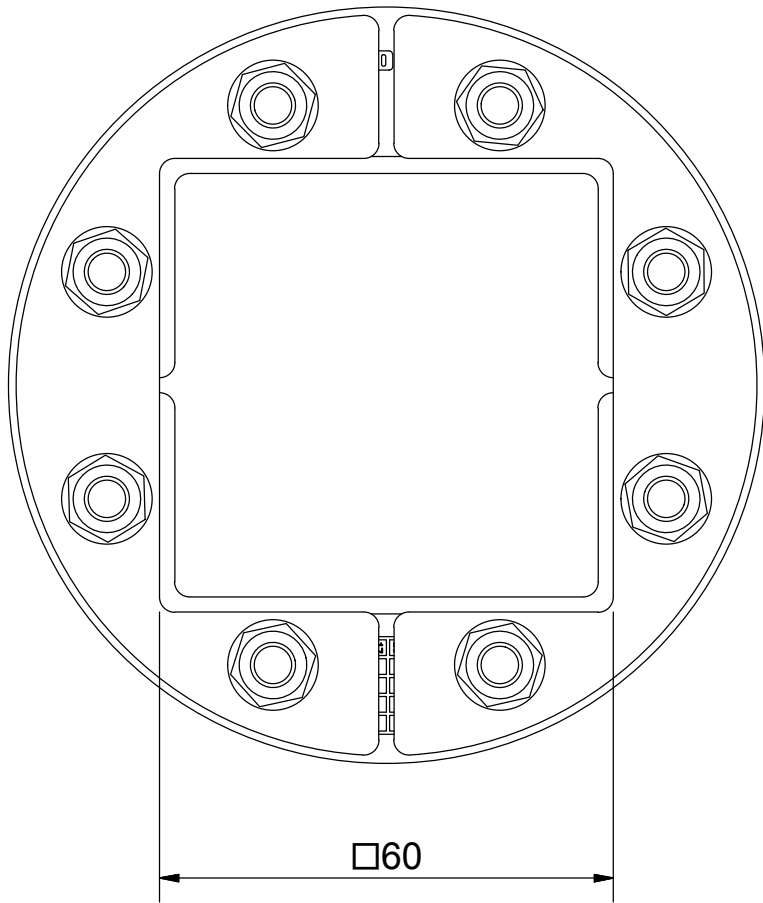




R 100/4 UG INSERTABLE KIT

MODULE	RANGE	QTY
RM 30 UG	0+10-23.5	4

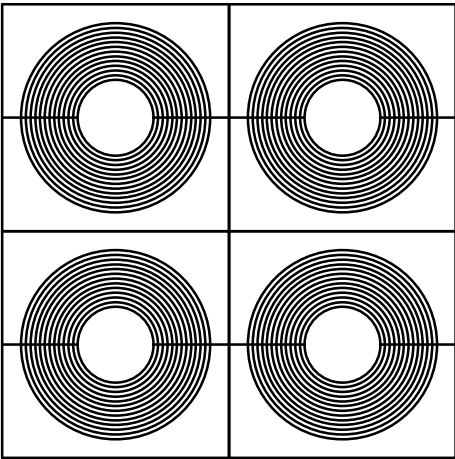

R 100/6 UG INSERTABLE KIT

MODULE	RANGE	QTY
RM 20 UG	0+4-13	1
RM 20W40 UG	0+4-13	2
RM 40 UG	0+9.5-31	1

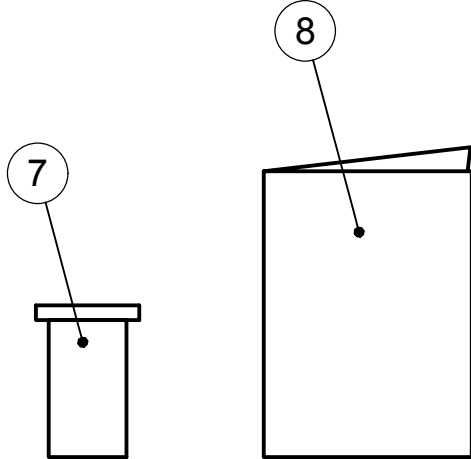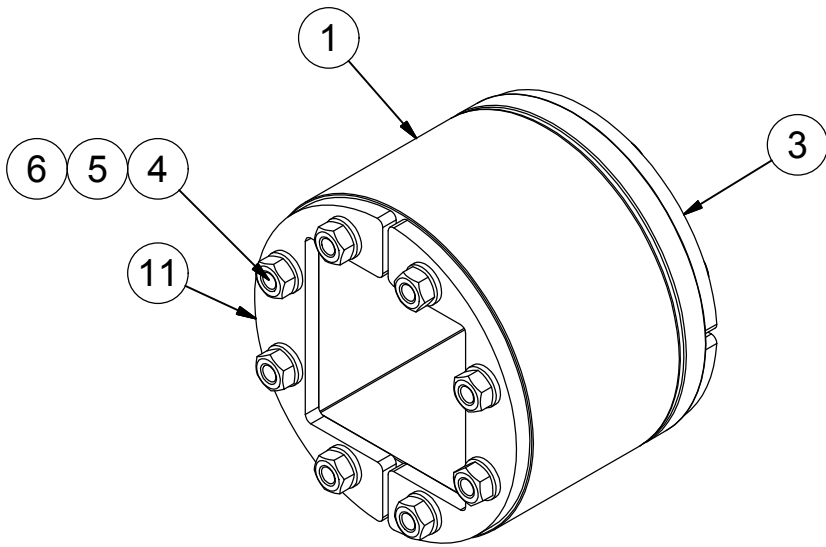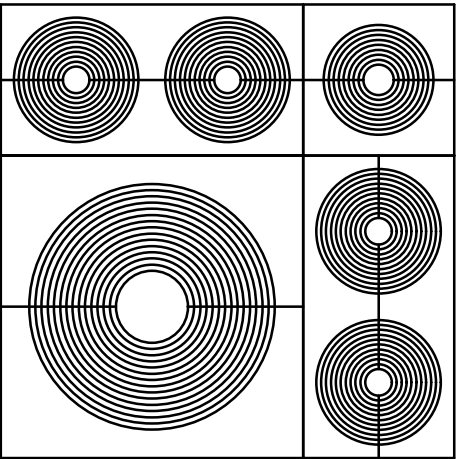

8	1	INSTALLATION INSTRUCTION		
7	1	LUBRICANT	TALLOW	
6	8	NUT	M6M M6 ISO 4032 A4	0
5	8	WASHER	BRB M6 ISO 7089 A4	0
4	8	SCREW	MVBF M6x80 DIN 603 A4	0
3	2	REAR FITTING	ACID PROOF STAINLESS STEEL	0.1
11	2	FRONT FITTING	ACID PROOF STAINLESS STEEL	0.1
1	1	RUBBER FRAME	ROXYLON HE	0.2

ITEM	QTY	Designation				Specification				Weight
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B		General surface roughness: Ra 12.5	Designed by/date xx-emikul 2017-02-06	Latest save date 2017-02-10	Format A3	Scale	Sheet no 1 / 1	TotWeight 0,7 kg




www.roxtec.com

R 100 UG INSERTABLE
KIT SOLUTIONS

Restricted due to
Information drawing

Drawing number
S1519387



A		2017-02-06	se-jenboh
Rev	Type of revision	Date	Sign