


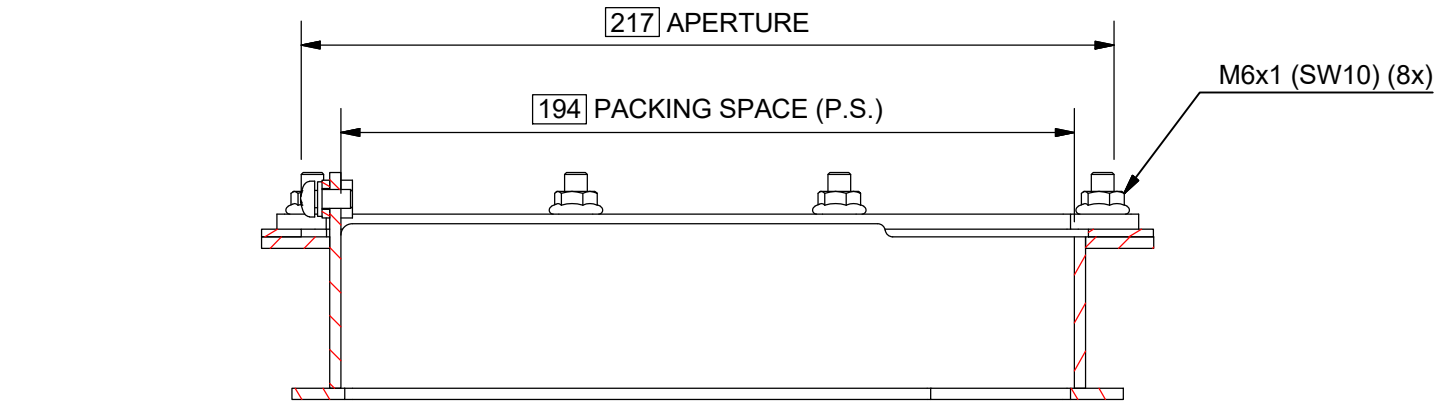
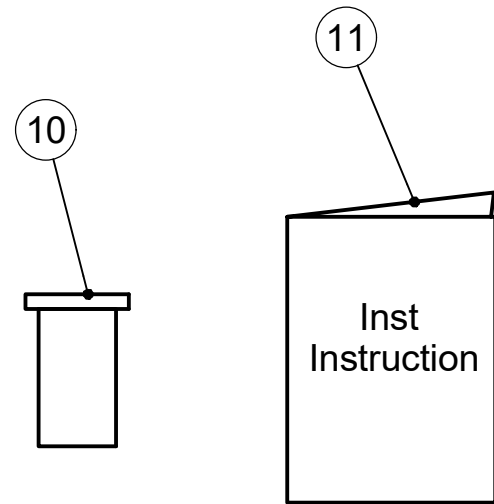
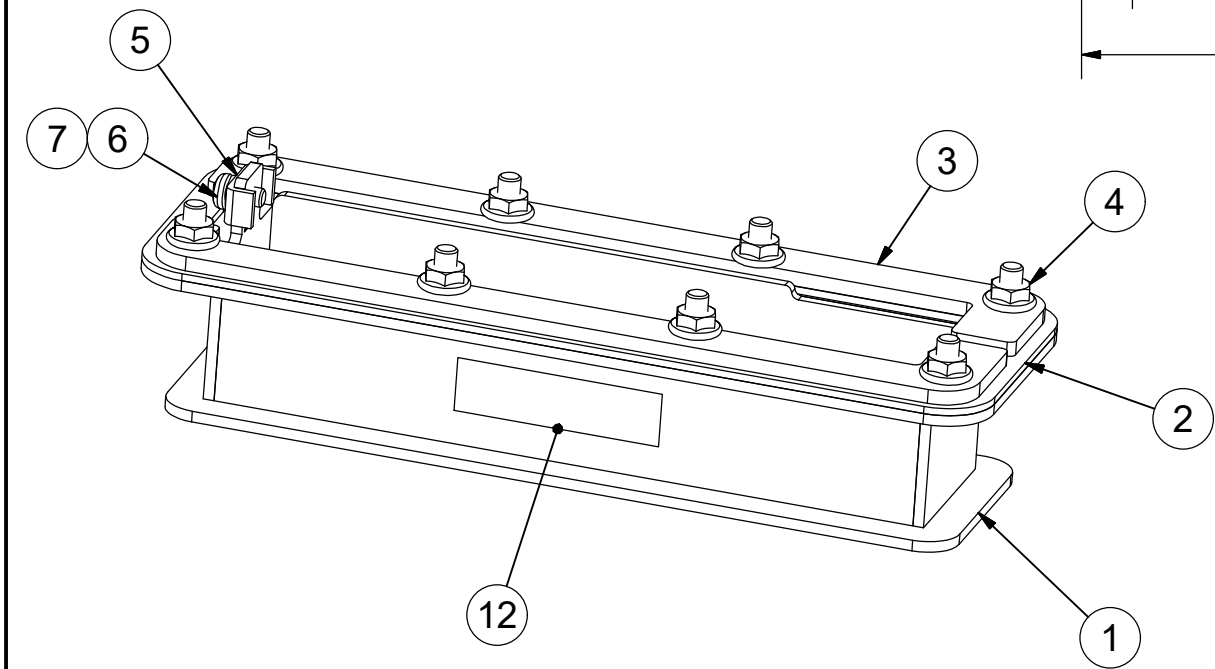


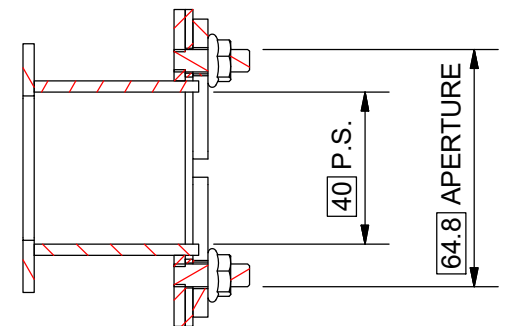


A-A (1 : 2)

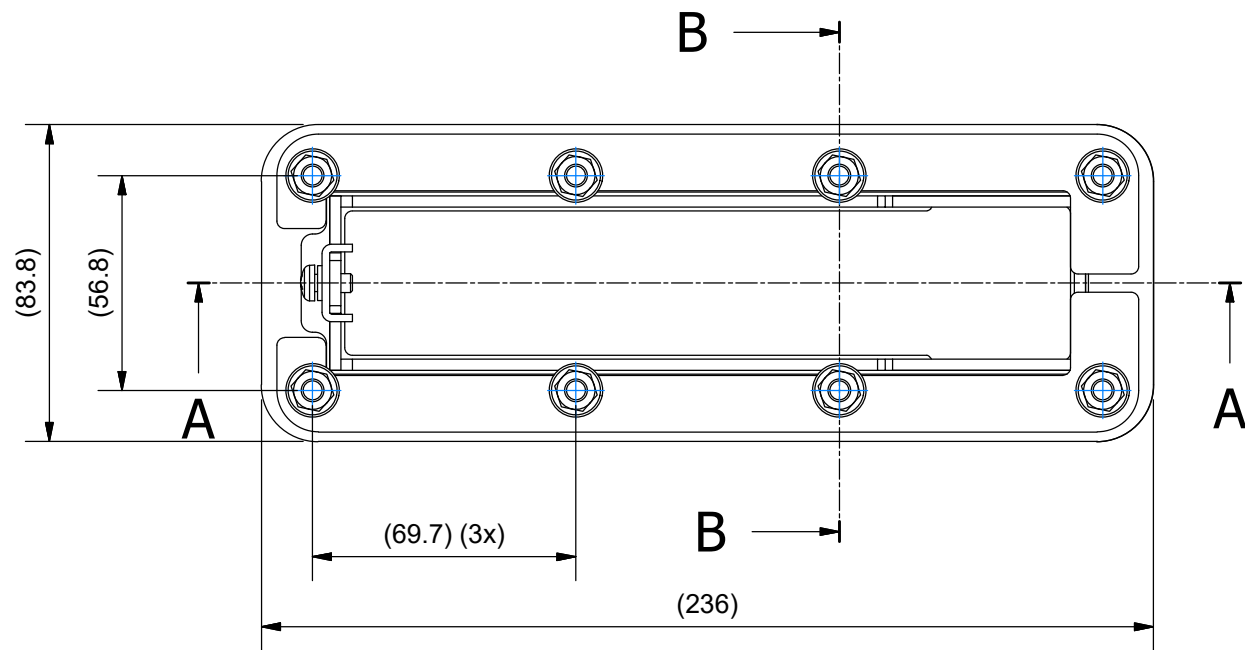

B-B (1 : 2)

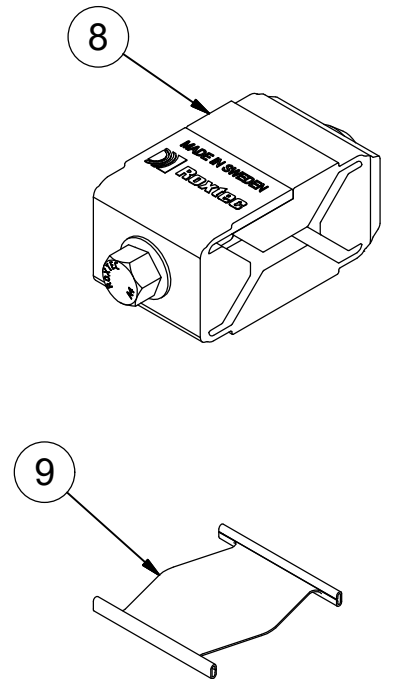

12	1	LABEL	HD 16		
11	1	INSTALLATION INSTRUCTION			
10	1	LUBRICANT	25 ML		
9	1	STAYPLATE 40 HD	ACID PROOF STAINLESS STEEL		
8	1	C WEDGE HD AISI316			
7	1	SCREW	M5x10, A4		
6	1	SPRING WASHER	M5, A4		
5	1	SADDLE WASHER	ACID PROOF STAINLESS STEEL		
4	8	FLANGED NUT	M6 SERRATED A4		
3	2	COUNTER FRAME	ACID PROOF STAINLESS STEEL		
2	1	GASKET	EPDM CELLULAR RUBBER		
1	1	HD 16 FRAME	ACID PROOF STAINLESS STEEL		
ITEM	QTY	Designation		Weight	
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B		General surface roughness: Ra 12.5	
Designed by/date se-robgus 2019-03-05		Latest save date 2019-09-20		Format A3	
Scale 1 / 1		Sheet no 1 / 1		TotWeight N/A	
 www.roxtec.com		Title HD 16 FRAME ASSEMBLY			Projection method 
		Restricted due to Information drawing		Drawing number S1541524	Rev A

A		2019-03-05	se-robgus
Rev	Type of revision	Date	Sign